

Part No.: R001536R

## Composite Video with Power Pair

ETL listed for guaranteed performance  
Made in the USA

### Applications

This document establishes the specifications siamese type cable containing one RG6/U and two conductors unshielded used in communication applications.

18/2

Conductor: 18AWG Stranded Bare Copper  
Insulation Material: Polyolefin.  
Color Code: Black, Red

### RG6/U


Conductor: 18AWG Solid Bare Copper  
Dielectric Material: Cellular Polyethylene.  
Nominal Dielectric Core O.D.: 0.180 in.  
Braid Shield: CCA

### Overall

Construction Type: Siamese  
Jacket Material: Polyvinyl Chloride  
Nominal Cable Dimensions: Minor: 0.270 in. (RG6/U)  
Minor: 0.198 in. (18/2)  
Major: 0.493 in.  
Jacket Color: Black or Per Customer Requirement

### RG6/U

Nominal Characteristic Impedance: 75 ohm  
Nominal Capacitance: 17.3 pF/ft  
Nominal Velocity of Propagation: 78%  
Nominal Attenuation per 100 ft:  
2.20 dB @ 100 MHz  
4.00 dB @ 200 MHz  
8.30 dB @ 900 MHz

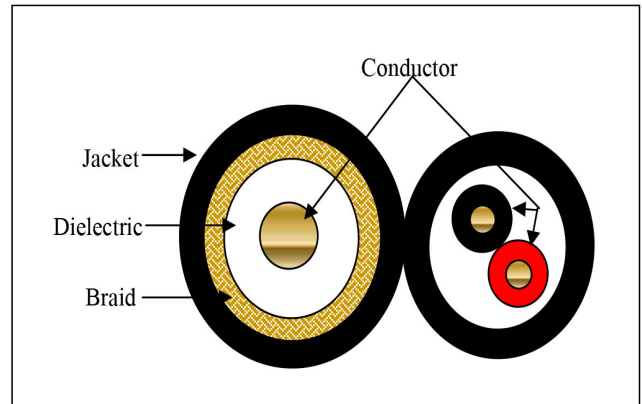

### Technical Details

Temperature Rating  
Operation: -10°C to +60°C  
Nominal Weight: 66 lbs. / 1,000 ft

### Standards

NEC Articles 800  
UL Subject 444

### Codes & Listings

CM Rating  
C(ETL)US CM

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.