

Part No.: NY12PST

12-2 Pair Shielded Local Law #5/73 Fire Alarm

ETL listed for guaranteed performance
Made in the USA

Applications


This document establishes the specifications for a two pair shielded cable used for Local Law #5/73 fire alarm installations.

Construction Details

Number of Conductors: 4/C (2 Pair)
Conductor: 12AWG Solid Bare Copper.
Insulation Material: FEP
Nominal Insulation Thickness: 0.016 in.
Nominal Insulation Diameter: 0.113 in.
Color Code: Pair #1, Black/Red
Pair #2, Black/White
Shield: Aluminum/Polyester Tape
Drain: Tin Copper
Jacket Material: FEP
Jacket Color: Red
Nominal Jacket Thickness: 0.026 in.
Nominal Diameter: 0.440 in.
Surface Print: REMEE PRODUCTS CORP TYPE
FPLP 12AWG SHIELDED 200°C
(ETL)US ALSO CLASSIFIED NYC
CERT. FIRE ALARM CABLE
+ Sequential Footage Marking

Electricals

Suggested Working Voltage: 300 Volts, rms.

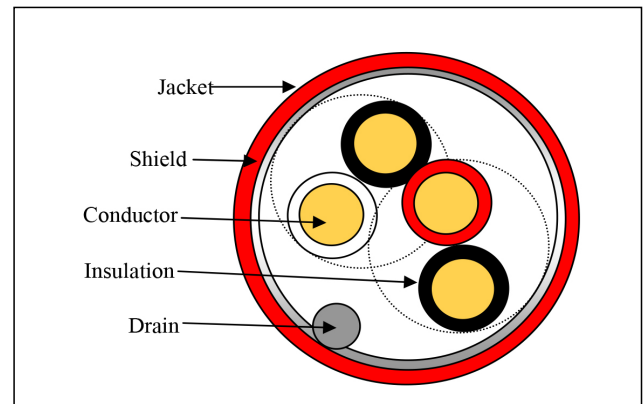

Technical Details

Temperature Rating
Operation -20°C to 200°C
Nominal Weight: 144 lbs. / 1,000 ft.

Standards

National Electric Code -Article 760 Type FPLP
Building Code City of New York
Certified For Use In New York City
Complies With City of New York Technical
Policy & Procedure Notice #2/95

Codes & Listings

UL Subject 1424 (ETL)US FPLP

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.