

Part No.: NY14PUT

14-2 Pair Unshielded Local Law #5/73 Fire Alarm

ETL listed for guaranteed performance
Made in the USA

Applications


This document establishes the specifications for a two pair unshielded cable used for Local Law #5/73 fire alarm installations.

Construction Details

Number of Conductors: 4/C (2 Pair)
Conductor: 14AWG Solid Bare Copper.
Insulation Material: FEP.
Nominal Insulation Thickness: 0.016"
Nominal Insulation Diameter: 0.097"
Color Code: Pair #1, Black/Red
Pair #2, Black/White
Shield: N/A
Drain: N/A
Jacket Material: FEP.
Jacket Color: Red
Nominal Jacket Thickness: 0.026"
Nominal Diameter: 0.367"
Surface Print: REMEE PRODUCTS CORP. TYPE
FPLP 14AWG 2P 200°C (ETL)US
ALSO CLASSIFIED NYC CERT.
FIRE ALARM CABLE +
SEQUENTIAL FOOTAGE
MARKING

Electricals

Suggested Working Voltage: 300 Volts, rms.

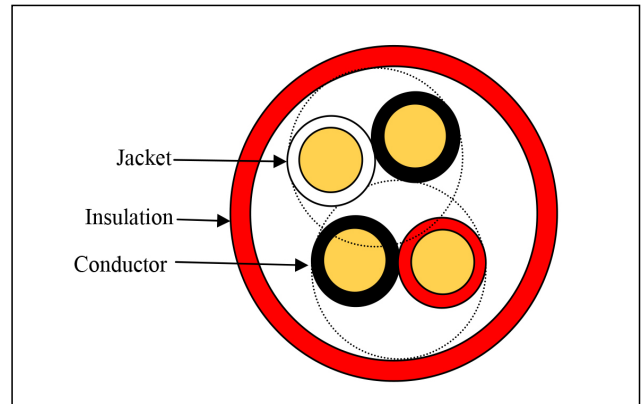

Technical Details

Temperature Rating
Operation -20°C to 200°C
Nominal Weight: 97 lbs. / 1,000 ft.

Standards

National Electric Code - Article 760 Type FPLP
Building Code City of New York
Certified For Use In New York City
Complies With City of New York Technical
Policy & Procedure Notice #2/95

Preparation for Shipment

(ETL)US FPLP
UL Subject 1424

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.