

Part No.: NY14PUT

## 14-2 Pair Unshielded Local Law #5/73 Fire Alarm

ETL listed for guaranteed performance  
Made in the USA

### Applications


This document establishes the specifications for a two pair unshielded cable used for Local Law #5/73 fire alarm installations.

### Construction Details

Number of Conductors: 4/C (2 Pair)  
Conductor: 14AWG Solid Bare Copper.  
Insulation Material: FEP.  
Nominal Insulation Thickness: 0.016"  
Nominal Insulation Diameter: 0.097"  
Color Code: Pair #1, Black/Red  
Pair #2, Black/White  
Shield: N/A  
Drain: N/A  
Jacket Material: FEP.  
Jacket Color: Red  
Nominal Jacket Thickness: 0.026"  
Nominal Diameter: 0.367"  
Surface Print: REMEE PRODUCTS CORP. TYPE  
FPLP 14AWG 2P 200°C (ETL)US  
ALSO CLASSIFIED NYC CERT.  
FIRE ALARM CABLE +  
SEQUENTIAL FOOTAGE  
MARKING

### Electricals

Suggested Working Voltage: 300 Volts, rms.

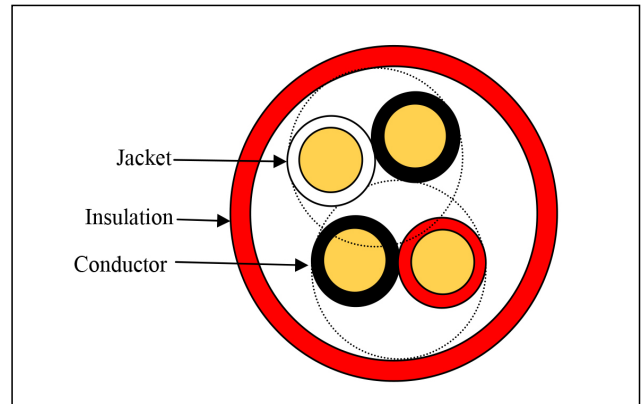

### Technical Details

Temperature Rating  
Operation -20°C to 200°C  
Nominal Weight: 97 lbs. / 1,000 ft.

### Standards

National Electric Code - Article 760 Type FPLP  
Building Code City of New York  
Certified For Use In New York City  
Complies With City of New York Technical  
Policy & Procedure Notice #2/95

### Preparation for Shipment

(ETL)US FPLP  
UL Subject 1424

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.