

Part No.: R001531

## RG-6/U Coaxial Cable Non-Plenum

ETL listed for guaranteed performance

### Applications


This document establishes the specifications for an RG 6/U Type 75 ohm coaxial cable used for video display, point-of-sale terminals, Local Area Network Controls, and CCTV Broadcasting applications.

### Construction Details

Center Conductor: 18AWG Solid Bare Copper  
Dielectric Material: Cellular Polyethylene  
Nominal Dielectric Core O.D: 0.180 in.  
Shield: CCA Braid  
Jacket Material: Polyvinyl Chloride  
Nominal Overall Diameter: 0.270 in.  
Jacket Color: Per Customer Requirement  
Surface Print: 3122598 RG6/U TYPE CM 18AWG C(ETL)US  
+ Sequential Footage Marking

### Electricals

Nominal Capacitance: 17.3 pF/ft  
Nominal Characteristic Impedance: 75 ohms  
Nominal Velocity of Propagation: 78%  
Nominal Attenuation per 100 feet:  
0.7 dB @ 10 MHz  
1.5 dB @ 50 MHz  
2.1 dB @ 100 MHz  
4.5 dB @ 400 MHz  
8.1 dB @ 1000 MHz

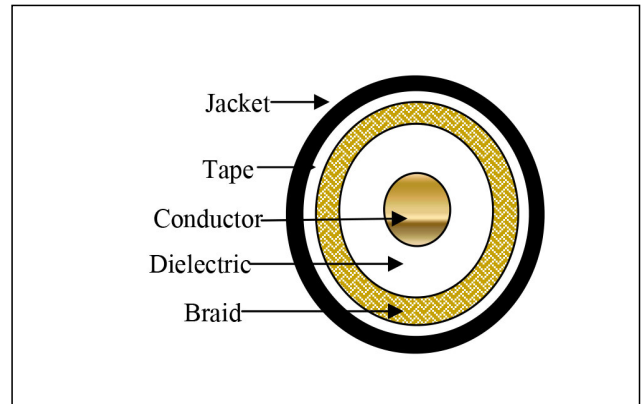

### Technical Details

Temperature Rating  
Operation: -20°C to +60°C  
Nominal Weight: 42 lbs. / 1,000 feet

### Standards

NEC Article 800  
CM Rating

### Codes & Listings

C(ETL)US CM

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.