

Part No.: CH1024F

14-4 Unshielded Audio Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Applications


This document establishes the specifications for a four conductor cable used in audio and power limited circuit applications.

Construction Details

Number of Conductors: 4/C
Conductor: 14 AWG 105/34 bare copper
Insulation Material: Polyvinyl Chloride
Insulation Thickness: 0.012 in.
Insulation Diameter: 0.097 in.
Color code: Black, Red, White, Green
Jacket material: Polyvinyl Chloride
Jacket thickness: 0.018 in.
Nominal Diameter: 0.270 in.
Surface Print: 3122598 HI-STRAND AUDIO
CABLE 4 COND 14AWG 105
STRAND CL3 75°C (ETL)US
MADE IN USA...SUITABLE FOR
OUTDOOR USE...OXYGEN FREE
COPPER + Sequential Footage
Marking

Electricals

Suggested Working Voltage: 150 Volts, rms.

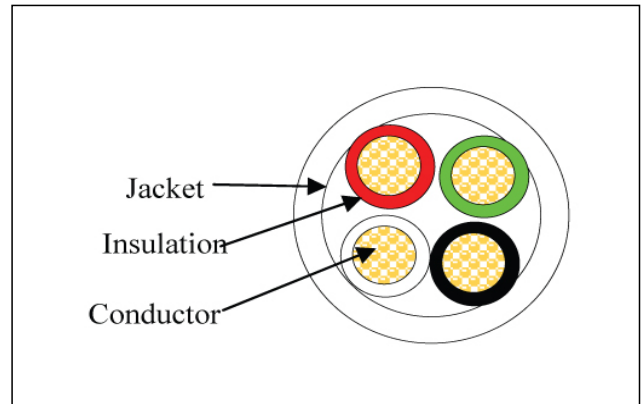

Standards

NEC Article 725
UL Subject 13, Type CL3

Codes & Listings

(ETL)US Type CL3

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.