

Part No.: CH1023F

## 16-4 Unshielded Audio Cable Non-Plenum

ETL listed for guaranteed performance  
Made in the USA

### Applications


This document establishes the specifications for a four conductor cable used in communication applications

### Construction Details

Number of Conductors: 4/C  
Conductor: 16 AWG 65/34 Bare Copper  
Insulation Material: Polyvinyl Chloride  
Nominal Insulation Thickness: 0.012 in.  
Nominal Insulation Diameter: 0.080 in.  
Color Code: Black, Red, White, Green  
Jacket Material: Polyvinyl Chloride  
Nominal Jacket Thickness: 0.018 in.  
Nominal Diameter: 0.238 in  
Surface Print: 3122598 HI-STRAND AUDIO  
CABLE 4 COND 16AWG 65  
STRAND CM/CL3 75°C  
C(ETL)US FT4 MADE IN USA"  
SUITABLE FOR OUTDOOR USE"  
OXYGEN FREE COPPER  
+ Sequential Footage Marking

### Electricals

Suggested Working Voltage: 300 Volts, rms.

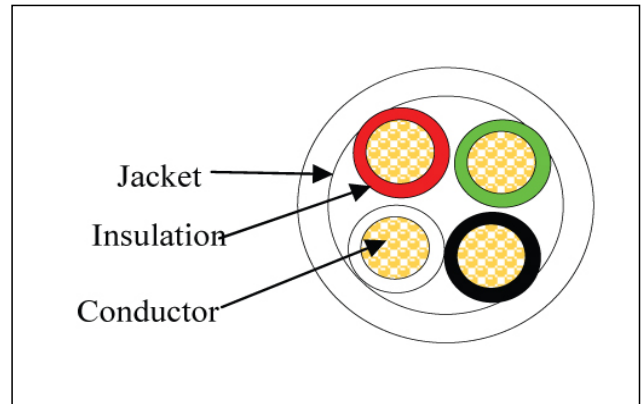

### Technical Details

Temperature Rating  
Operation -20°C to +75°C  
Nominal Weight: 50 lbs. / 1,000 Feet

### Standards

NEC Article 800  
UL Subject 444, Type CMR/CL3R FT4

### Codes & Listings

C(ETL)US Type CM/CL3 FT4

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.