



Issue Date: 11/30/-0001  
Revision #:

Part No.: RMMS5AE+1564W


## Cat 5e RG6U Quad Siamese Jacketed Non Plenum

### Applications

Supports all category 5 applications including Ethernet 100BASE-TX, 100BASE-VG and 155 ATM. Particularly suited for high bandwidth applications such as 622 ATM, Wideband, and Ethernet 1000BASE-T.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

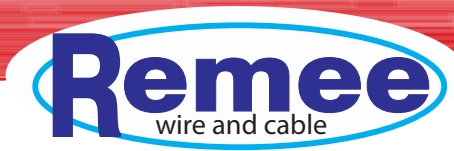

## Electrical Characteristics:

Frequency	SRL	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT
MHz	dB	dB	dB(100m)	dB	dB	dB	dB
	Minimum	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum
1	23.0	20.0	2.0	70.3	68.3	63.8	60.8
4	23.0	20.3	4.0	61.3	59.3	51.7	48.7
10	23.0	25.0	6.4	55.3	53.3	43.8	40.8
16	23.0	25.0	8.2	52.3	50.3	39.7	36.7
20	23.0	25.0	9.2	50.8	48.8	37.7	34.7
31.25	21.1	23.6	11.7	47.9	45.9	33.9	30.9
62.5	18.1	21.5	16.9	44.3	41.4	27.8	24.8
100	16.0	20.1	21.9	40.3	38.3	23.8	20.8