

Part No.: 725120

12-2 Unshielded Plenum

ETL listed for guaranteed performance
Made in the USA

Applications


This document establishes the specifications for a plenum rated two conductor unshielded cable used for communication applications.

Construction Details

Number of Conductors: 2/C
Conductor: 12AWG Stranded Bare Copper
Insulation Material: Remguard Plenum Polymer
Nominal Insulation Thickness: 0.009 in.
Nominal Insulation Diameter: 0.107 in.
Color Code: Black, Natural
Shield: N/A
Drain: N/A
Jacket Material: Remguard Plenum Polymer
Jacket Color: Per Customer Requirement
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.244 in.
Surface Print: 3122598 CL3P 12AWG (ETL)US
FT6 + Sequential Footage Marking

Electricals

Suggested Working Voltage: 300 Volts, rms.

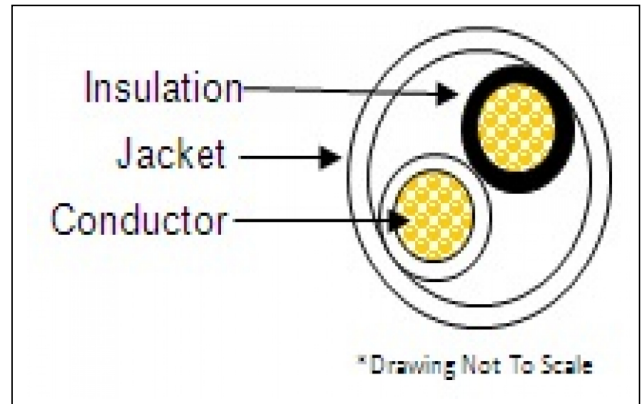

Technical Details

Temperature Rating
Operation: -2°C to +60°C
Nominal Weight: 52 lbs. / 1,000 feet

Standards

NEC Article 725
CL3P Rating FT6

Codes & Listings

(ETL)US CL3P

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.