

Part No.: 725223

22-4 Shielded Plenum

Applications


This document establishes the specifications for plenum rated four conductor shielded cable used for communication applications.

Construction Details

Number of Conductors: 4/C
Conductor: 22AWG Stranded Bare Copper
Insulation Material: Remguard Plenum Polymer
Nominal Insulation Thickness: 0.007 in.
Nominal Insulation Diameter: 0.043 in.
Color Code: Black, Natural, Red, Green
Shielding: Overall Aluminum/Polyester (100% coverage)
Drain: Stranded Tin Copper
Jacket Material: Remguard Plenum Polymer
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.137 in.
Surface print: 3122598 CMP 22AWG C(ETL)US
FT6 + Sequential Footage Marking

Electricals

Suggested Working Voltage: 300 Volts, rms.

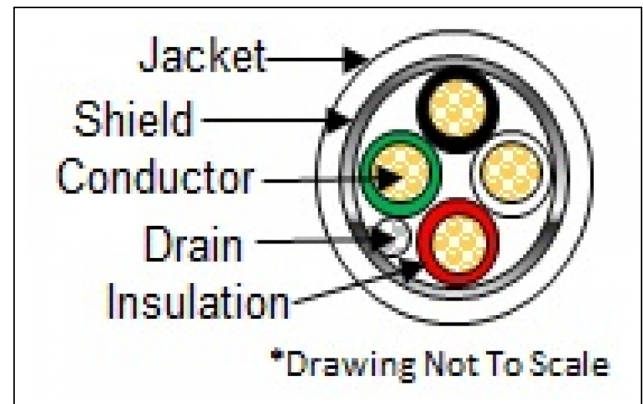

Technical Details

Temperature Rating
Operation: -2°C to +60°C
Nominal Weight: 17 lbs. /1,000 feet

Standards

NEC Article 800
UL Subject 444, Type CMP FT6

Codes & Listings

C(ETL)US CMP FT6

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.