

Part No.: 900948

22-8 Shielded Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Applications


This document establishes the specifications for a
eight conductor shielded cable used in
communication applications.

Construction Details

Number of Conductors: 8/C
Conductor: 22AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Nominal Insulation Thickness: 0.008 in.
Nominal Insulation Diameter: 0.045 in.
Color Code: White, Black, Red, Green, Blue,
Brown, Orange, Yellow
Shield: Aluminum/Polyester Tape (100% Coverage)
Drain: Stranded Tin Copper
Jacket Material: Polyvinyl Chloride
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.185 in.
Surface Print: 3122598 CM 22AWG C(ETL)US
+ Sequential Footage Marking

Electricals

Suggested Working Voltage: 300 Volts, rms.

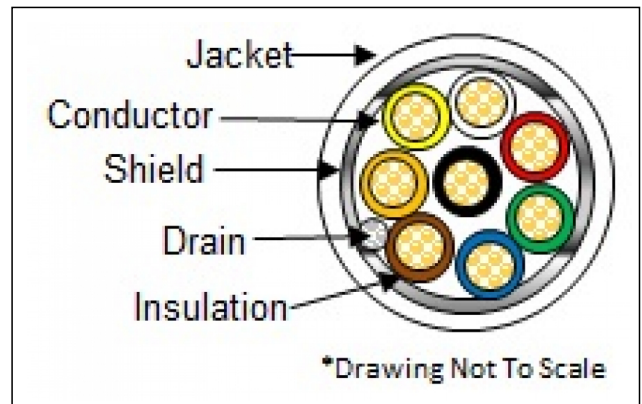

Technical Details

Temperature Rating
Operation -20°C to +60°C
Nominal Weight: 28 lbs. / 1,000 feet

Standards

NEC Article 800
UL Subject 444, Type CM

Codes & Listings

C(ETL)US

Preparation for Shipment

The cable shall be packaged to preclude the
inducement of damage due to handling and
transportation, and shall be in accordance
with the best commercial practices available.
Shipping containers shall be constructed as
to eliminate any possible damage to the
cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This
product is RoHS compliant and is directive 2002/95/EC. It is the
sole responsibility of the user to have the most current specification.
Specifications are subject to change without notice.