

Part No.: R00907

Access Control Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Applications

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Component 1 Construction Details


Number of Conductors: 4/C
Conductor: 18AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Insulation Color Code: Black, Red, White, Green
Jacket Material: Polyvinyl Chloride
Jacket Color: Gray
Rip Cord: Nylon
Nominal Diameter: 0.179 in.
Surface Print: 3122598 POWER LOCK CMP 4/18AWG C(ETL)US

Component 2 Construction Details

Number of Conductors: 6/C (3 Pairs)
Conductor: 22AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Insulation Color Code: Black paired with Red
White paired with Green
Orange paired with Brown
Overall Shield: Aluminum/Polyester
Drain Wire: Stranded Tin Copper
Jacket Material: Polyvinyl Chloride
Jacket Color: Orange
Rip Cord: Nylon
Nominal Diameter: 0.200 in.
Surface Print: 3122598 CARD READER CMP 3P/22AWG C(ETL)US

Component 3 Construction Details

Number of Conductors: 2/C
Conductor: 22AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Insulation Color Code: Black, Red
Jacket Material: Polyvinyl Chloride
Jacket Color: White
Rip Cord: Nylon

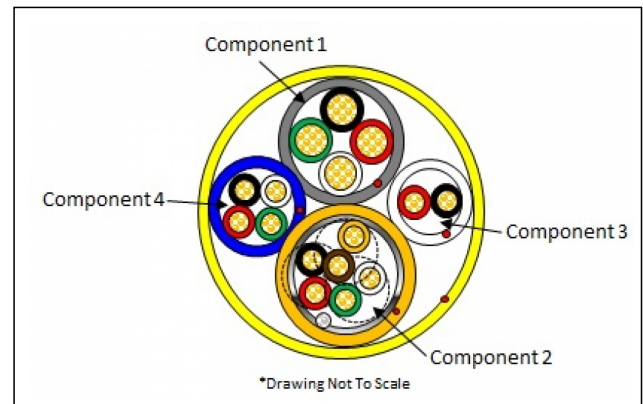

Codes & Listings

NEC Article 800
UL Subject 444, Type CMR
C(ETL)US

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.



Nominal Diameter: 0.122 in.
Surface Print: 3122598 DOOR CONTACT CMP 2/22AWG
C(ETL)US

Component 4 Construction Details

Number of Conductors: 4/C
Conductor: 22AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Insulation Color Code: Black, Red, Green, White
Jacket Material: Polyvinyl Chloride
Jacket Color: Blue
Rip Cord: Nylon
Nominal Diameter: 0.140 in.
Surface Print: 3122598 REX/SPARE CMP 4/22AWG C(ETL)US

Construction Details (Overall)

Construction: Four components are cabled together and overall jacketed
Jacket Material: Polyvinyl Chloride
Nominal Jacket Thickness: 0.025 in.
Nominal Diameter: 0.445 in.
Surface Print: 3122598 ACCESS CONTROL CABLE CMP
4/18AWG 12/22AWG C(ETL)US +

Electricals

Suggested Working Voltage: 300 Volts, rms.