

Part No.: R001006R

18-2 Unshielded Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Applications


This document establishes the specifications for a two conductor unshielded cable used for audio, and remote control applications, suitable for outdoor use

Construction Details

Number of Conductors: 2/C
Conductor: 18AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Nominal Insulation Thickness: 0.008 in.
Nominal Insulation Diameter: 0.062 in.
Color Code: Black, Red
Jacket Material: Polyvinyl Chloride
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.154 in.
Surface Print: 3122598 CMR 18AWG C(ETL)US
FT4 A B C D E F 0 1 2 3 4 5 6 7 8
9...SUITABLE FOR OUTDOOR
USE + Sequential Footage Marking

Electricals

Suggested Working Voltage: 300 Volts, rms.

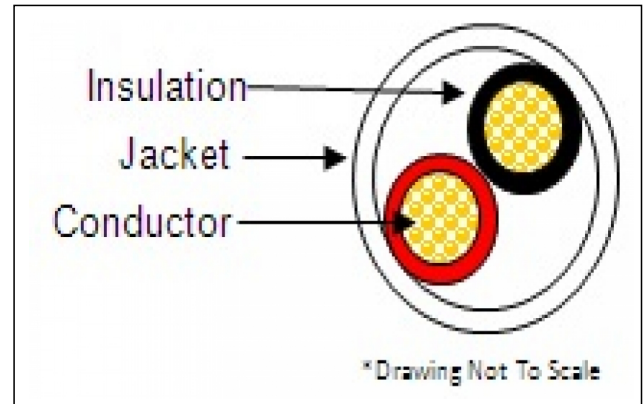

Technical Details

Temperature Rating
Operation -20°C to +60°C.
Nominal Weight: 17 lbs. / 1,000 feet

Standards

NEC Article 800
UL Subject 444, CMR FT4

Codes & Listings

C(ETL)US

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.