

Part No.: R001006R

## 18-2 Unshielded Non-Plenum

ETL listed for guaranteed performance  
Made in the USA

### Applications


This document establishes the specifications for a two conductor unshielded cable used for audio, and remote control applications, suitable for outdoor use

### Construction Details

Number of Conductors: 2/C  
Conductor: 18AWG Stranded Bare Copper  
Insulation Material: Polyvinyl Chloride  
Nominal Insulation Thickness: 0.008 in.  
Nominal Insulation Diameter: 0.062 in.  
Color Code: Black, Red  
Jacket Material: Polyvinyl Chloride  
Nominal Jacket Thickness: 0.015 in.  
Nominal Diameter: 0.154 in.  
Surface Print: 3122598 CMR 18AWG C(ETL)US  
FT4 A B C D E F 0 1 2 3 4 5 6 7 8  
9...SUITABLE FOR OUTDOOR  
USE + Sequential Footage Marking

### Electricals

Suggested Working Voltage: 300 Volts, rms.

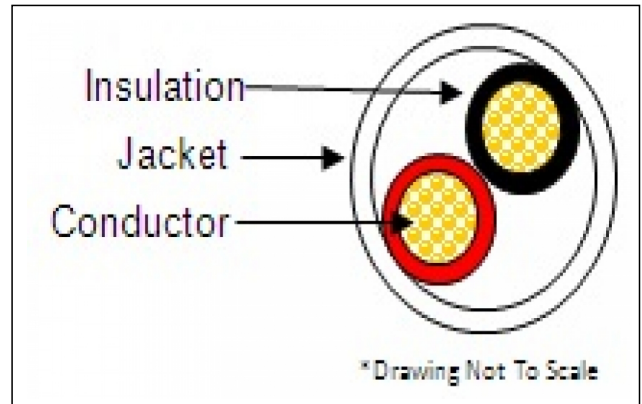

### Technical Details

Temperature Rating  
Operation -20°C to +60°C.  
Nominal Weight: 17 lbs. / 1,000 feet

### Standards

NEC Article 800  
UL Subject 444, CMR FT4

### Codes & Listings

C(ETL)US

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.