

Part No.: 5AEFLD

Category 5e 350 MHz Polyethylene Jacket

Made in the USA

Applications

Supports all category 5 applications including Ethernet 100BASE-TX, 100BASE-VG and 155 ATM. Particularly suited for high bandwidth applications such as 622 ATM, Wideband, and Ethernet 1000BASE-T

Construction Details


No. 24 AWG solid bare copper conductor insulated with polyethylene. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled to form a core. The core is flooded with a polyethylene jacket. Water resistant and suitable for outdoor use.

Electricals

Mutual Capacitance: 14 pF/ft nominal
Capacitance Unbalance: 330 pF/ft maximum
Velocity of Propagation: 70%
Max. Conductor D.C.R.: 28.6 ohm/1000 feet
Max. DCR Unbalance: 5%
Max. Delay Skew: 45.0 ns/100m
Characteristic Impedance: from 0.772 - 100 MHz 100 ohm 15%
from 101 - 200 MHz 100 ohm 22%
from 201 - 350 MHz 100 ohm 32%

Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

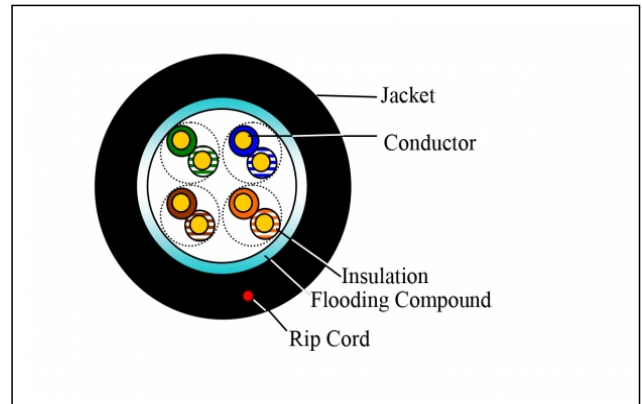

Technical Details

Temperature Rating
Storage
Installation
-40°C to 85°C
-25°C to 75°C
Operation -40°C to 75°C
Nominal Overall Diameter: 0.225 in.
Jacket Color: UV Resistant Black

Standards

ANSI/TIA/EIA 568C.2 Category 5e

Codes & Listings


Non-Listed

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

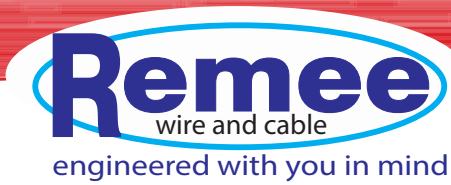

Electrical Characteristics:

Frequency	SRL dB	Return Loss dB	Attenuation dB/100m	NEXT dB	PS-NEXT dB	ELFEXT dB	PS-ELFEXT dB	ACR dB	PS-ACR dB
MHz	Minimum	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	23.0	20.0	2.0	70.3	68.3	63.8	60.8	68.3	66.3
4	23.0	20.3	4.0	61.3	59.3	51.7	48.7	57.3	55.3
10	23.0	25.0	6.4	55.3	53.3	43.8	40.8	48.9	46.9
16	23.0	25.0	8.2	52.3	50.3	39.7	36.7	44.1	42.1
20	23.0	25.0	9.2	50.8	48.8	37.7	34.7	41.6	39.6
31.25	21.1	23.6	11.7	47.9	45.9	33.9	30.9	36.2	34.2
62.5	18.1	21.5	16.9	43.4	41.4	27.8	24.8	26.5	24.5
100	16.0	20.1	21.9	40.3	38.3	23.8	20.8	18.4	16.4
250	12.0	17.3	36.8	34.3	32.3	15.8	12.8	---	---
300	11.2	16.8	40.9	33.2	31.2	14.2	11.2	---	---
350	10.6	16.3	44.8	32.2	30.2	12.9	9.9	---	---