

Part No.: 6RF234UTPENH

## Category 6 750MHz Non-Plenum

ETL listed for guaranteed performance

### Applications

Supports all Gigabit Ethernet/1000BASE-T/IEEE 802.32ab, ATM up to 155 Mbps, 100 Mbps Fast Ethernet 100BASE-T/IEEE 802.3, ANSI.X3.263 FDDI TP-PMD, Ethernet 10BASE-T/IEEE 802.5, T1/E1, xDSL, ISDN, 550 MHz Broadband Video and standards under development such as ATM at 622 Mbps, 1.2, 2.4 and 4.8 Gbps

### Construction Details


No. 23 AWG solid bare copper conductor insulated with polyethylene. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled to form a core. The core is jacketed with a flame retardant PVC.  
Surface Print: ETL VERIFIED CAT6 TO TIA-568C.2...3122598  
CMR ENHANCED CAT6 23AWG 4UTP C(ETL)US FT4 MADE IN USA

### Electricals

Mutual Capacitance: 14 pF/ft nominal  
Capacitance Unbalance: 330 pF/ft maximum  
Velocity of Propagation: 70%  
Max. Conductor D.C.R.: 28.6 ohm/1,000 feet  
Max. DCR Unbalance: 5%  
Max. Delay Skew: 45.0 ns/100m  
Characteristic Impedance: from 0.772 - 100 MHz  $100 \pm 15\%$   
from 101 - 250 MHz  $100 \pm 22\%$   
from 251 - 750 MHz  $100 \pm 32\%$

### Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

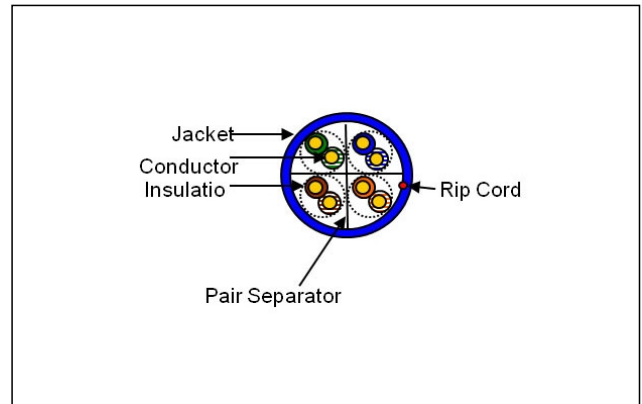

### Technical Details

Temperature Rating  
Installation 0°C to 50°C  
Operation -10°C to 60°C  
Nominal Diameter 0.240 in.  
Nominal cable weight: 34 lb/1000 feet

### Standards

ANSI/TIA/EIA 568C.2 Category 6  
National Electric Code - Article 800

### Codes & Listings

CMR Rating FT4  
ETL Electrically Verified to ANSI/TIA/EIA 568C.2  
Category 6  
C(ETL)US CMR

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

**Electrical Characteristics:**

Frequency	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR
	dB	dB(100m)	dB	dB	dB	dB	dB	dB
MHz	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	20.0	2.0	80.3	78.3	73.8	70.8	78.3	76.3
4	23.0	3.8	71.3	69.3	61.8	58.8	67.5	65.5
10	25.0	6.0	65.3	63.3	53.8	50.8	59.3	57.3
16	25.0	7.6	62.2	60.2	49.7	46.7	54.6	52.6
20	25.0	8.5	60.8	58.8	47.8	44.8	52.3	50.3
31.25	23.6	10.7	57.9	55.9	43.9	40.9	47.2	45.2
62.5	21.5	15.4	53.4	51.4	37.9	34.9	38.0	36.0
100	20.1	19.8	50.3	48.3	33.8	30.8	30.5	28.5
200	18.0	29.0	45.8	43.8	27.8	24.8	16.8	14.9
250	17.3	32.8	44.3	42.3	25.8	22.8	11.5	9.5
300	16.8	36.4	43.1	41.1	24.3	21.3	-----	-----
350	16.3	39.8	42.1	40.1	22.9	19.9	-----	-----
400	15.9	43.0	41.3	39.3	21.8	18.8	-----	-----
500	14.8	49.5	40.2	38.2	20.0	17.0	-----	-----
550	14.4	53.1	39.5	37.5	18.9	15.9	-----	-----
650	18.6	56.8	36.1	34.1				
750	18.4	59.5	35.6	33.6				