

Part No.: 6B234UTPENHDUAL

## Category 6 Siamese 550MHz Plenum

ETL listed for guaranteed performance  
Made in the USA

### Applications

Supports all Gigabit Ethernet/1000BASE-T/IEEE 802.32ab, ATM up to 155 Mbps, 100 Mbps Fast Ethernet 100BASE-T/IEEE 802.3, ANSI.X3.263 FDDI TP-PMD, Ethernet 10BASE-T/IEEE 802.5, T1/E1, xDSL, ISDN, 550 MHz Broadband Video and standards under development such as ATM at 622 Mbps, 1.2, 2.4 and 4.8 Gbps

### Construction Details


No. 23 AWG solid bare copper conductor insulated with FEP. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled to form a core. Two cores are pulled parallel and jacketed in a siamese construction using low smoke flame retardant PVC.

### Electricals

Mutual Capacitance: 14 pF/ft nominal  
Capacitance Unbalance: 330 pF/100m maximum  
Velocity of Propagation: 72%  
Max. Conductor D.C.R.: 28.6 ohm/1,000 feet  
Max. DCR Unbalance: 5%  
Max. Delay Skew: 45.0 ns/100m  
Characteristic Impedance: from 0.772 - 100 MHz 100 ohm 15%  
from 101 - 250 MHz 100 ohm 22%  
from 251 - 550 MHz 100 ohm 32%

### Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

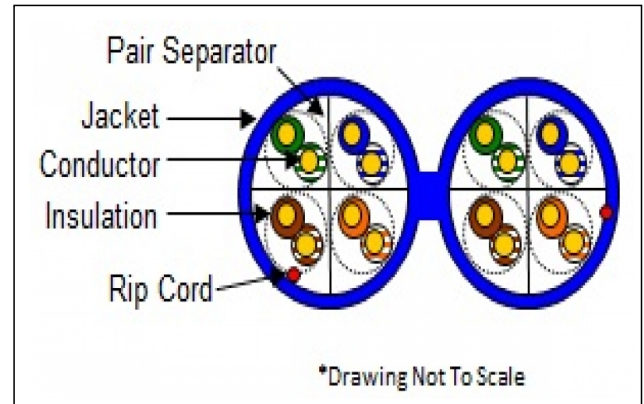

### Technical Details

Temperature Rating  
Installation: 0°C to 50°C  
Operation: -10°C to 60°C  
Nominal Diameters: Minor: 0.230 in.  
Major: 0.485 in.  
Nominal Cable Weight: 96 lbs/1,000 feet

### Standards

ANSI/TIA/EIA 568C.2 Category 6  
National Electric Code ? Article 800

### Codes & Listings

CMP rating FT6  
ETL Electrically Verified to ANSI/TIA/EIA 568C.2  
Category 6  
C(ETL)US CMP

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

