

Part No.: 6DBFLD234UTP

Category 6 Flooded Polyethylene Jacket

Made in the USA

Applications

Supports all category 6 applications including Ethernet 100BASE-TX, 100BASE-VG and 155 ATM. Particularly suited for high bandwidth applications such as 622 ATM, Wideband, Ethernet 1000BASE-T and emerging applications with anticipated data rates to 3.2 Gbps suitable for outdoor use.

Construction Details

No. 23 AWG copper conductor insulated with polyethylene. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled to form a core. The core is flooded with a UV resistant black polyethylene jacket.


Surface Print: 4 PAIR 23AWG SOLID CAT6 SUITABLE FOR WET APPLICATIONS OUTDOOR DIRECT BURIAL

Electrical Parameters

Suggested Working Voltage: 300 Volts, rms.
Mutual Capacitance: 14 pF/ft nominal
Capacitance Unbalance: 330 pF/ft maximum
Velocity of Propagation: 70%
Max. Conductor D.C.R.: 28.6 ohm/1000 feet
Max. DCR Unbalance: 5%
Max. Delay Skew: 45.0 ns/100m
Characteristic Impedance: from 0.772 - 100 MHz $100 \pm 15\%$
from 100 - 250 MHz $100 \pm 22\%$

Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

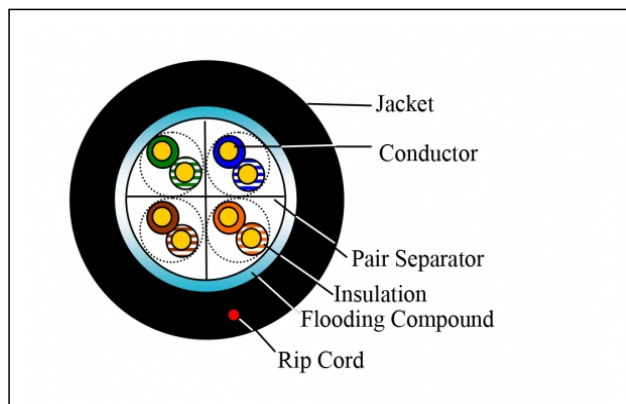

Technical Details

Temperature Rating:
Installation -40°C to 60°C
Operation -40°C to 60°C
Nominal Diameter 0.260 in.

Standards

ANSI/TIA/EIA 568C.2 Category 6

Codes & Listings

Non-listed

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.



Frequency	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR
MHz	dB	dB(100m)	dB	dB	dB	dB	dB	dB
	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	20.0	2.0	80.3	78.3	73.8	70.8	78.3	76.3
4	23.0	3.8	71.3	69.3	61.8	58.8	67.5	65.5
10	25.0	6.0	65.3	63.3	53.8	50.8	59.3	57.3
16	25.0	7.6	62.2	60.2	49.7	46.7	54.6	52.6
20	25.0	8.5	60.8	58.8	47.8	44.8	52.3	50.3
31.25	23.6	10.7	57.9	55.9	43.9	40.9	47.2	45.2
62.5	21.5	15.4	53.4	51.4	37.9	34.9	38.0	36.0
100	20.1	19.8	50.3	48.3	33.8	30.8	30.5	28.5
200	18.0	29.0	45.8	43.8	27.8	24.8	16.8	14.9
250	17.3	32.8	44.3	42.3	25.8	22.8	11.5	9.5