

Part No.: 725526

## Composite Video with Power Pair

ETL listed for guaranteed performance  
Made in the USA

### Applications

This document establishes the specifications for a plenum rated composite cable containing one RG59/U and two conductors unshielded, jacketed in a siamese construction used in communication applications.

18/2

Conductor: 18AWG Stranded Bare Copper  
Insulation Material: Remguard Plenum Polymer  
Color Code: Black, Red

### RG59/U


Conductor: 20AWG Solid Bare Copper  
Dielectric Material: Foamed FEP  
Nominal Dielectric Core O.D.: 0.135 in.  
Braid Shield: CCA

### Overall

Construction Type: Siamese  
Jacket Material: Remguard Plenum Polymer  
Nominal Cable Dimensions: Minor: 0.196 in. (RG59/U)  
Major: 0.389 in.  
Jacket Color: Black or Per Customer Requirement

### RG59/U

Nominal Characteristic Impedance: 75 ohm  
Nominal Capacitance: 16.3 pF/ft  
Nominal Velocity of Propagation: 83%  
Nominal Attenuation per 100 ft:  
2.80 dB @ 100 MHz  
4.10 dB @ 200 MHz  
6.30 dB @ 400 MHz                      9.20 dB @ 700 MHz

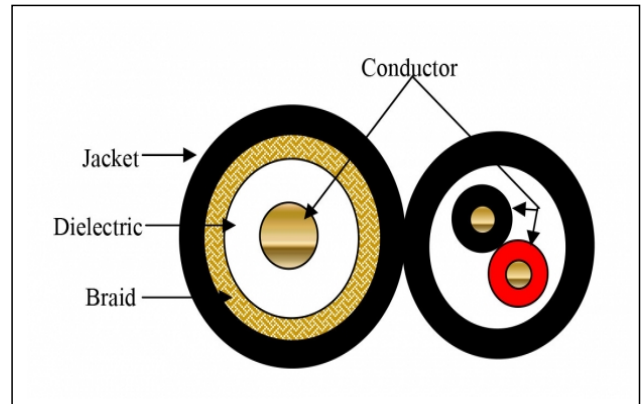

### Technical Details

Temperature Rating  
Operation: -2°C to +60°C  
Nominal Weight: 49 lbs. / 1,000 ft

### Standards

NEC Articles 800  
UL Subject 444

### Codes & Listings

CMP Rating FT6  
C(ETL)US CMP

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.