

Part No.: R001006WBTPOLY

18-2 Unshielded Polyethylene

Made in the USA

Applications


This document establishes the specifications for a two conductor unshielded cable with a water swellable tape and polyethylene jacket used for audio, and remote control applications, suitable for outdoor use, sunlight resistant.

Construction Details

Number of Conductors: 2/C
Conductor: 18AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Nominal Insulation Thickness: 0.008 in.
Nominal Insulation Diameter: 0.062 in.
Color Code: Black, Red
Tape: Water Swellable Tape
Jacket Material: UV Resistant Polyethylene
Nominal Jacket Thickness: 0.020 in.
Nominal Diameter: 0.184 in.
Surface Print: REMEE PRODUCTS 18AWG 2
CONDUCTOR + Sequential Footage
Marking

Electricals

Maximum Working Voltage: 300 Volts, rms.

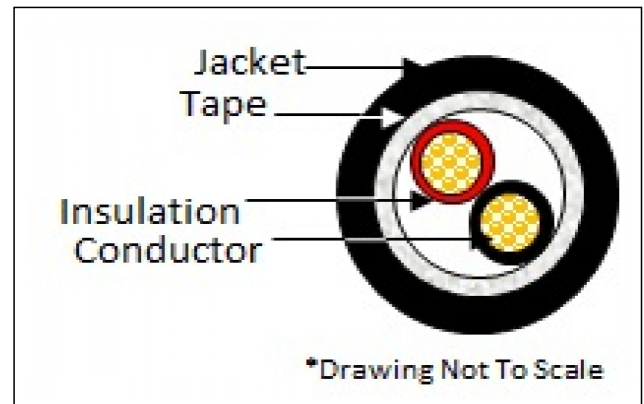

Technical Details

Temperature Rating
Operation -20°C to +60°C.
Nominal Weight: 17 lbs. / 1,000 feet

Codes & Listings

Non-Listed

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.