

Part No.: R001006WBTPOLY

## 18-2 Unshielded Polyethylene

Made in the USA

### Applications


This document establishes the specifications for a two conductor unshielded cable with a water swellable tape and polyethylene jacket used for audio, and remote control applications, suitable for outdoor use, sunlight resistant.

### Construction Details

Number of Conductors: 2/C  
Conductor: 18AWG Stranded Bare Copper  
Insulation Material: Polyvinyl Chloride  
Nominal Insulation Thickness: 0.008 in.  
Nominal Insulation Diameter: 0.062 in.  
Color Code: Black, Red  
Tape: Water Swellable Tape  
Jacket Material: UV Resistant Polyethylene  
Nominal Jacket Thickness: 0.020 in.  
Nominal Diameter: 0.184 in.  
Surface Print: REMEE PRODUCTS 18AWG 2  
CONDUCTOR + Sequential Footage  
Marking

### Electricals

Maximum Working Voltage: 300 Volts, rms.

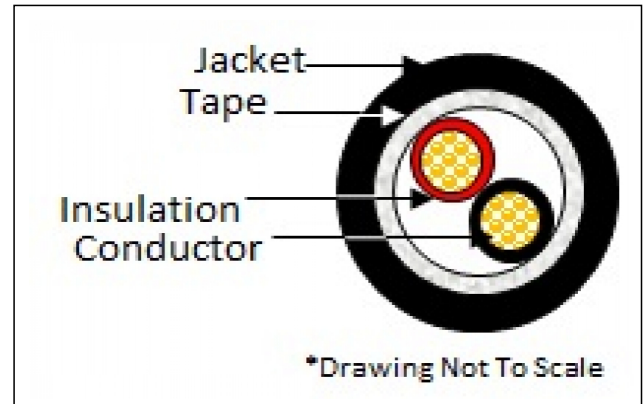

### Technical Details

Temperature Rating  
Operation -20°C to +60°C.  
Nominal Weight: 17 lbs. / 1,000 feet

### Codes & Listings

Non-Listed

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.