


Part No.: 10-002-22J-AZNONF

## 10 Series Distribution Tight Buffer Simplex 62.5Micron MM OFNR

### Scope

This document establishes the specification requirements for a multimode 6.25/125 OM1 general purpose duplex fiberoptic cable. This cable construction consists of multimode fibers in a duplex tight-buffered design with a riser rated PVC jacket suitable for indoors in the riser.

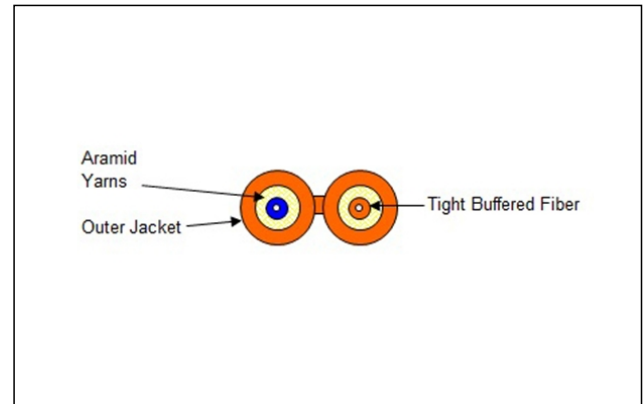

### Applications

Riser Indoor

### Applicable Documents

- TIA/EIA FOTP Standards 455
- Color Coding of Fiber Optic Cables TIA/EIA-598
- UL 1666
- GR-409-CORE

### Overall Cable Construction

- Tight Buffered Fiber
- Dimension: 900 $\mu$ m, nominal.  
Tight buffered fiber color code: 1-blue, 2-orange
- Cable strength  
Aramid yarns are pulled in with the tight-buffered fiber under the siamese outer jacket.
- Outer Sheath  
Orange riser rated PVC jacket (or color per customer request)
- Cable Markings  
REMFO 10 SERIES, FIBER OPTIC CABLE, 2-6.25/125 OM1, REMEE PRODUCTS CORP., MM/YY (month & year of manufacture), OFNR C(ETL)US, Sequentially meter marked.
- Special print as required by customer.

### Fiber Attenuation

$\leq 3.2/1.0$  dB/km

### Fiber Bandwidth

