


Part No.: 33-XXX-22J-RZSXNP

## 33 Series Distribution Tight Buffer 62.5Micron MM (12+ Fiber) OFNP

### Scope

This document establishes the specification requirements for a distribution multimode OM1, fiberoptic cable. This cable construction consists of multimode fibers in a distribution tight-buffered design with a plenum rated jacket.

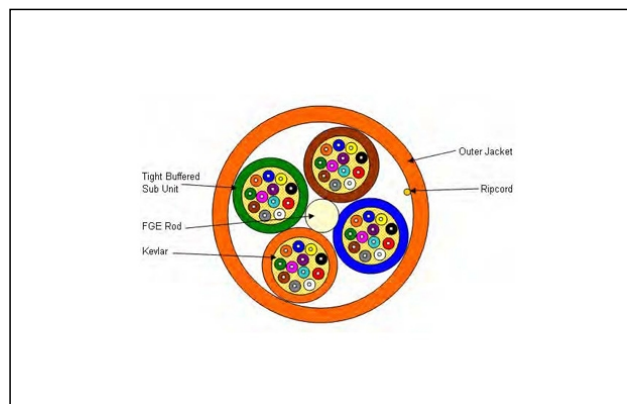

### Applications

Plenum Indoor

### Applicable Documents

TIA/EIA FOTP Standards 455

- Color Coding of Fiber Optic Cables TIA/EIA-598
- UL 910
- GR-409-CORE

### Overall Cable Construction

- Tight Buffered Fiber
- Dimension: 900µm, nominal.  
Tight buffered fiber color code: 1-blue, 2-orange, 3-green, 4-brown, 5-slate, 6-white, 7-red, 8-black, 9-yellow, 10-violet, 11-rose, and 12-aqua.
- Sub-unit consists of aramid yarns that are pulled in with the tight-buffered fibers under a sub-unit jacket that is uniquely identified.
- Cable strength Member  
Fiberglass Epoxy Rod (dielectric)
- An up coat of plenum material (if necessary per construction for symmetry).
- Cable Core  
Sub-units and fillers (if needed) are stranded around the CSM, using reverse oscillation.
- A non-wicking and non-hygroscopic tape is applied longitudinally with a nominal 25% overlap.
- Binder yarns are applied over the core tape.
- Outer Sheath  
Orange plenum rated Remguard? jacket (or color per customer request)
- Cable Markings  
REMFO 33 SERIES, FIBER OPTIC CABLE, XX (denotes number of fibers)-62.5/125, REMEE PRODUCTS CORP., MM/YY (month & year of manufacture), OFNP C(ETL)US, Sequentially marked.
- Special print as required by customer.

