


Part No.: 27-XXX-22J-ABSXNF

27 Series Loose Tube Indoor/Outdoor OFNR 62.5Micron MM

Scope

This document establishes the specifications for a riser rated, indoor/outdoor, all dielectric, multimode OM1, dry block fiber optic cable in a loose buffer tube design suitable for outdoors in duct, aerial lashed, indoors in the riser and acceptable in tray installation as well.

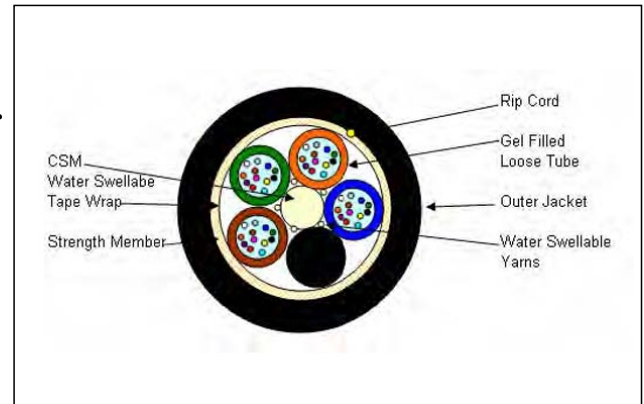

Applications

Riser Indoor or Outdoor in duct or aerial lashed

Applicable Documents

- TIA/EIA FOTP Standards 455
- Color Coding of Fiber Optic Cables TIA/EIA-598
- UL 1666
- GR-20-CORE

Overall Cable Construction

- Buffer tube
 - High Modulus Polymeric material.
Dimension: 2.8 mm, nominal with the exception of the 4 fiber cable which is 2.2mm, nominal
Tube and fiber color code per EIA/TIA-598 or as specified by customer.
 - Filling compound: A non-toxic and dermatological safe antioxidant hydrocarbon based gel.
Dielectric central strength member with water swellable yarns. An up-coat of polymer (if necessary per construction)
- Cable Core:
The cable elements are stranded around the CSM, using reverse oscillation.
Moisture Resistance: A water blocking tape is applied over the cable core to prevent water ingress and migration with a nominal of 25% overlap.
- Non-wicking binder yarns are applied over the core tape.
- Cable strength
Circumferential strength members are placed over the cable core and under the outer sheath.
- Outer Sheath
UV Resistant Black Riser Rated PVC. (or color per customer request)
A ripcord is applied under the outer sheath.
- Cable Markings
REMFO 27 SERIES, FIBER OPTIC CABLE, # of fibers-62.5/125, REMEE PRODUCTS CORP., MM/YY (Month & Year of manufacture), OFNR C(ETL)US, Sequentially marked.
- Special print as required by customer.

