


Part No.: 27-XXX-74E-ABSXNF

27 Series Loose Tube Indoor/Outdoor OFNR SM Enhanced

Scope

This document establishes the specifications for a riser rated, indoor/outdoor, all dielectric, singlemode OS2, dry block fiber optic cable in a loose buffer tube design.

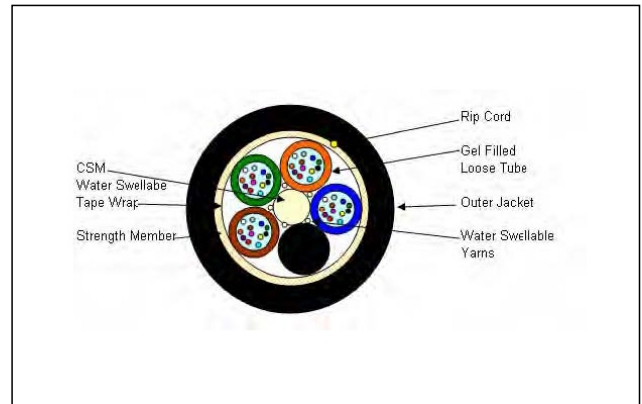

Applications

Riser Indoor or Outdoor in duct or aerial lashed

Applicable Documents

TIA/EIA FOTP Standards 455

- Color Coding of Fiber Optic Cables

- UL 1666

TIA/EIA-598

Overall Cable Construction

- Buffer tube
- High Modulus Polymeric material.

Dimension: 2.8 mm., nominal.

Tube and fiber color code per EIA/TIA-598 or as specified by customer.

- Filling compound: A non-toxic and dermatological safe antioxidant hydrocarbon based gel.
- Dielectric Central strength member with water swellable yarns. An up-coat of polymer (if necessary per construction)

Cable Core:

The cable elements are stranded around the CSM, using reverse oscillation.

Moisture Resistance: A water blocking tape is applied over the cable core to prevent water ingress and migration with a nominal of 25% overlap.

- Non-wicking binder yarns are applied over the core tape.

Cable strength

Circumferential strength members are placed over the cable core and under the outer sheath.

- Outer Sheath

UV Resistant Black Riser Rated PVC. (or color per customer request)

A ripcord is applied under the outer sheath.

Cable Markings

REMFO 27 SERIES, FIBER OPTIC CABLE, # of fibers-SM, REMEE PRODUCTS CORP., TELEPHONE HANDSET SYMBOL, MM/YY (Month & Year of manufacture), OFNR C(ETL)US, Sequentially marked. Special print as required by customer.

Fiber Attenuation



$\leq 0.35/0.25$ dB/km

Mechanical & Environmental Performance

Maximum Tensile Load for:
- Installation: 2700N / 607lbf
- Long Term: 890N / 200lbf
Minimum bending radius:
- Loaded: 20 x diameter
- Unloaded: 10 x diameter
Crush Resistance: 220N/cm

Impact Resistance: 25 Impacts (min.)
Flexing, $\pm 90^\circ$: 25 Cycles (min.)
Temperature Rating:
Operation, -40°C to $+70^\circ\text{C}$
Installation, -20°C to $+55^\circ\text{C}$
Storage, -40°C to $+70^\circ\text{C}$
Twist Test: 25 Cycles (min.)

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available.

Warranty Info

All warranty information can be viewed at www.remee.com.
This product is RoHS compliant and is directive 2002/95/EC.
It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.