


Part No.: 57-XXX-22J-ABCXNN

## 57 Series Loose Tube Unitube Outdoor PVC 62.5Micron MM

### Scope

This document establishes the specifications for an outdoor, multimode 62.5/125 OM1, single 3mm central tube design with a flame retardant PVC jacket.

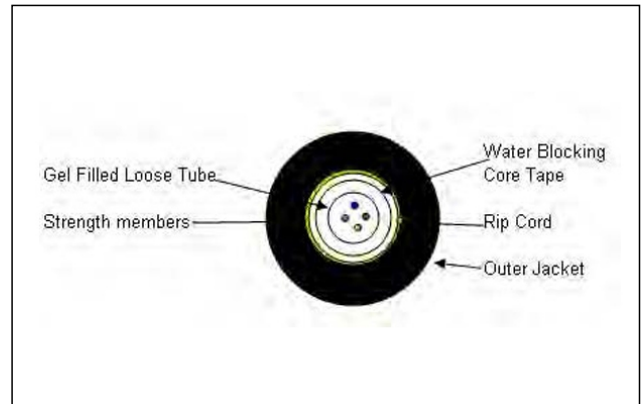

### Applications

Outdoor duct/aerial lashed

### Applicable Documents


TIA/EIA FOTP Standards 455  
- Color Coding of Fiber Optic Cables TIA/EIA-598

### Overall Cable Construction

- Buffer tube
  - High Modulus Polymeric material.  
Dimension: 3.0 mm., nominal.  
Tube color: white  
Fiber color code: per TIA/EIA-598
  - Filling compound: A non-toxic and dermatological safe antioxidant hydrocarbon based gel.
  - Cable Core:  
The cable core consists of the buffer tube with a moisture resistant water-blocking tape applied over the tube to prevent water ingress and migration with a nominal of a 25% overlap.
  - Cable strength  
Circumferential strength members are placed over the cable core and under the outer sheath.
  - Outer Sheath  
UV Resistant Flame Retardant Black PVC  
Wall thickness (nominal): 1.52mm.  
A ripcord is applied under outer sheath.
- Cable Markings  
REMFO 57 SERIES, FIBER OPTIC CABLE, No. of Fibers-62.5/125, REMEE PRODUCTS CORP., MM/YY (Month & Year of Manufacture), Sequentially meter marked.
- Note: This product is not OFNR, ETL or UL listed.

### Fiber Attenuation

$\leq 3.2 / 1.0$  dB/km

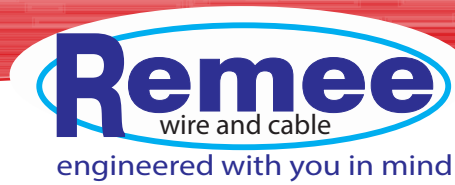

## Fiber Bandwidth

$\geq 200/600$  MHz-km

## Mechanical & Environmental Performance

Maximum Tensile Load for:

- Installation: 1335N / 300lbf

- Long Term: 334N / 75lbf

Minimum bending radius:

- Loaded: 20 x diameter

- Unloaded: 10 x diameter

Crush Resistance: 220N/cm

Impact Resistance: 25 Impacts (min.)

Flexing,  $\pm 90^\circ$ : 25 Cycles (min.)

Temperature rating:

Operation,  $-40^\circ\text{C}$  to  $+70^\circ\text{C}$

Installation,  $-20^\circ\text{C}$  to  $+55^\circ\text{C}$

Storage,  $-40^\circ\text{C}$  to  $+70^\circ\text{C}$

## Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage, due to handling and transportation, and shall be in accordance with the best commercial practices available.

## Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com).

This product is RoHS compliant and is directive 2002/95/EC.

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.