


Part No.: 23-XXX-76E-MBSXWN

## 23-XXX-76E-MBSXWN

### Scope

This document establishes the specifications for an outdoor, direct burial, armored singlemode (OS2) fiberoptic cable, in a dry block loose buffer tube design.

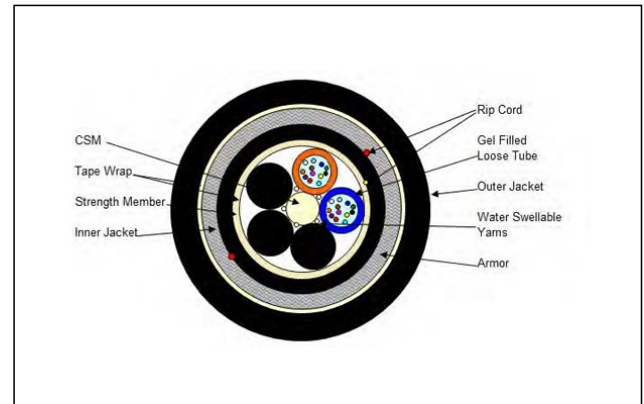

### Applications

Outdoor duct/aerial lashed/direct burial

### Applicable Documents

- TIA/EIA FOTP Standards 455
- Color Coding of Fiber Optic Cables TIA/EIA-598
- RUS 1755.900
- GR-20-CORE

### Overall Cable Construction

- Buffer tube
- High Modulus Polymeric material.  
Dimension: 2.8 mm., nominal.  
Tube and fiber color code per EIA/TIA-598 or as specified by customer.
- Filling compound: A non-toxic and dermatological safe antioxidant hydrocarbon based gel.  
Dielectric Central strength member.  
Epoxy glass rod with an up-coat of polymer (if necessary per construction).
- Water swellable yarns are to be pulled in with the CSM.
- Cable Core:  
The cable elements are stranded around the CSM, using reverse oscillation.  
Moisture Resistance: A water blocking tape is applied over the cable core to prevent water ingress and migration with a nominal of 25% overlap.
- Non-wicking binder yarns are applied over the core tape.
- Cable strength  
Circumferential strength members are placed over the cable core and under the outer sheath.
- Inner Sheath  
Polyethylene  
A ripcord is applied under the inner sheath.
- Moisture Resistance  
A water blocking tape is applied over the cable core to prevent water ingress and migration with a nominal of 25% overlap.
- Steel Armor tape  
Corrugated flexible steel with plastic coating for bonding to sheath. The armor of each length of cable shall be electrically continuous with no more than one splice allowed per kilometer of cable. The breaking

