

12-2 Pair Shielded Local Law #5/73 Fire Alarm

ETL listed for guaranteed performance
Made in the USA

Part No.: NY12PST

Applications:

This document establishes the specifications for a two pair shielded cable used for Local Law #5/73 fire alarm installations.

Construction Details:


Number of Conductors: 4/C (2 Pair)
 Conductor: 12AWG Solid Bare Copper.
 Insulation Material: FEP
 Nominal Insulation Thickness: 0.016 in.
 Nominal Insulation Diameter: 0.113 in.
 Color Code: Pair #1, Black/Red
 Pair #2, Black/White
 Shield: Aluminum/Polyester Tape
 Drain: Tin Copper
 Jacket Material: FEP
 Jacket Color: Red
 Nominal Jacket Thickness: 0.026 in.
 Nominal Diameter: 0.440 in.
 Surface Print: REMEE PRODUCTS CORP TYPE
 FPLP 12AWG SHIELDED 200°C
 (ETL)US ALSO CLASSIFIED NYC
 CERT. FIRE ALARM CABLE
 + Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating	Operation	-20°C to 200°C
Nominal Weight:	144 lbs. / 1,000 ft.	

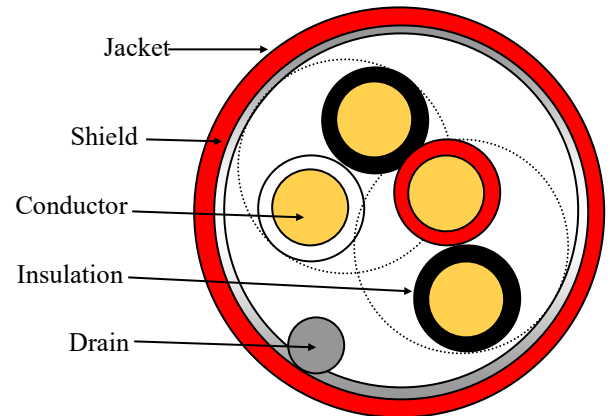

Standards:

- National Electric Code—Article 760 Type FPLP
- Building Code City of New York
- Certified For Use In New York City
- Complies With City of New York Technical Policy & Procedure Notice #2/95

Codes & Listings:

- UL Subject 1424
- (ETL)US FPLP

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.




Issue Date: 06/15
Revision: 4

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

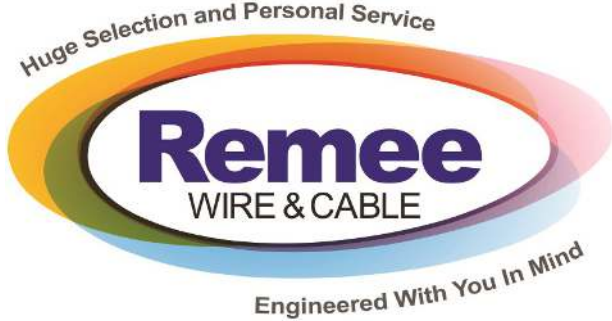

12-2 Pair Shielded Local Law #5/73 Fire Alarm

ETL listed for guaranteed performance
Made in the USA

Part No.: NY12PST

Note: While Remeo Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeo Products Corp. does not guarantee that it is error-free, nor does Remeo Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeo Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeo Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____
Company: _____
Date: _____



Issue Date: 06/15
Revision: 4

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com