



# 18-6 Unshielded Non-Plenum

UL listed for guaranteed performance

Part No.: 186TH

## Applications:

This document establishes the specifications for a six conductor unshielded non-plenum cable used for power limited applications.

## Construction Details:


Number of Conductors: 6/C  
 Conductor: 18AWG Solid Bare Copper.  
 Insulation material: Polyvinyl Chloride.  
 Color code: Red, White, Green, Blue, Yellow, Brown  
 Jacket material: Polyvinyl Chloride  
 Jacket Color: UV Resistant Brown  
 Nominal Diameter: 0.200 in.  
 Surface Print: XXXXXX 18AWG 6/C CL2 (ETL)US (CSA)...UV RESISTANT  
 \*XXXXXX Represents ETL Control Number  
 Sequential footage marking 0' to 250' with 250' on outside of reel

## Electricals:

Suggested Working Voltage: Voltage Not Specified

## Technical Details:

Temperature Rating	Operation	-20°C to +60°C
Nominal Weight:	40 lbs. / 1,000 ft.	

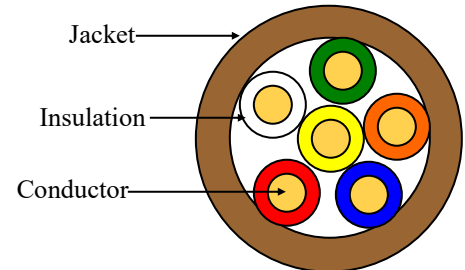

## Standards:

- National Electric Code—Article 725
- UL Subject 13, Type CL2

## Codes & Listings:

- UL or ETL

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Issue Date: 06/15  
 Revision: 1

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)