



18-2 Unshielded + 1 Fiber Siamese Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 40-3300112SAO-2C18

Applications:

This document establishes the specifications for a plenum rated two conductor unshielded cable and a one fiber cable in a siamese construction used for low voltage communication applications

Construction Details (18/2):

Number of Conductors: 2/C
 Conductor: 18AWG Stranded Bare Copper
 Insulation Material: Remguard Plenum Polymer
 Nominal Insulation Thickness: 0.008 in.
 Nominal Insulation Diameter: 0.074 in.
 Color Code: Black, Natural
 Shield: None
 Drain: None

Electricals (18/2):

Suggested Working Voltage: 300 Volts, rms.

*Fiber Construction Details:

Tight Buffered Fiber
 Dimension: 900µm, nominal.
 Tight buffered fiber color code: 1-blue
 Cable strength: Water swellable aramid yarns are pulled in with the tight-buffered fibers under the outer jacket.

Overall Construction Details:

Construction Type: 18AWG 2 Conductor cable and 1 fiber with water swellable aramid yarns are pulled in and jacketed in a siamese construction.

Jacket Material: Remguard Plenum Polymer
 Nominal Jacket Thickness: 0.030 in
 Jacket Color: Aqua UV Resistant
 Nominal Overall Dimensions: Minor (18/2): 0.184 in.

Minor (Fiber): 0.170 in.
 Major: 0.379 in.

Surface Print: 3122598 2/C 18AWG + 1—50/125 OM3
 10GIG INDOOR/OUTDOOR CMP/OFNP
 C(ETL)US FT6 + Sequential Footage Marking

Fiber Optic Mechanical & Environmental:

Max. Tensile Load for Installing: 1405/315lbf
 Max. Tensile Load, Long-Term: 455N/102lbf
 Crush Resistance (EIA 455-41): 100 N/cm
 Impact Resistance (EIA 455-25): 25 Impacts
 Flexing, ±90° (EIA 455-104): 25 Cycles

Technical Details:

Temperature Rating

Storage:	-2°C to +60°C
Installation:	0°C to +50°C
Operation:	-2°C to +60°C

Min. Bend Radius, Unloaded: 10 x O.D.

Min. Bend Radius, Loaded: 20 x O.D.

Nominal Weight: 36 lbs. / 1,000 ft.

DC Resistance @ 20°C 6.48 Ohms/1M'

Nominal Capacitance Cond—Cond 26.7 pF/FT

Standards:

- NEC Article 800
- CMP/OFNP Rating

Codes & Listings:

- C(ETL)US CMP/OFNP FT6

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA




Issue Date: 03/16
 Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

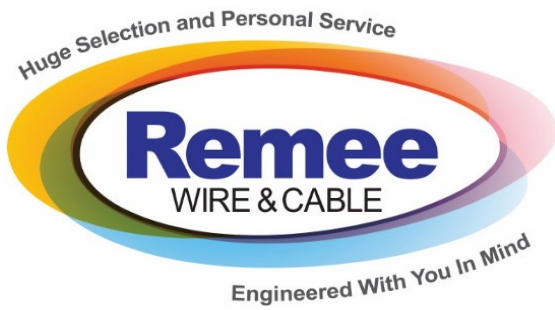

18-2 Unshielded + 1 Fiber Siamese Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 40-3300112SAO-2C18

Fiber Type	Multimode*
Maximum Attenuation @ 850/1300nm	3.0 /1.0 dB/km**
LED Performance (Overfilled Launch Bandwidth)	1500/500MHz-km@850/1300
Laser EMB Performance	2000/500MHz-km@850/1300
Core Diameter, nominal	50 ± 2.5 µm
Cladding Diameter	125.0 ± 1.0 µm
Primary Coating Diameter	242 ± 5 µm
Cladding Non-circularity	<0.7%
Core-Clad Concentricity	≤1.0 µm
Zero Dispersion Wavelength	1295-1340nm
Maximum Zero Dispersion Slope	0.105 ps/nm ² -km
Numerical Aperture	0.20 ± .015
Group Refractive Index @ 850/1300nm	1.482/1.477
Proof Test	100 kpsi

*Guaranteed Gigabit Ethernet Distance of 300mtr at 850nm for 10 Gb/s per IEEE802.3ae and 1000mtr at 850nm for 1 Gb/s per IEEE802.3z.
** Measured attenuations on shipping reels will not exceed the nominal values by .75dB/km (Tight Buffered Cables Only)



MADE IN THE USA




Issue Date: 03/16
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .


1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

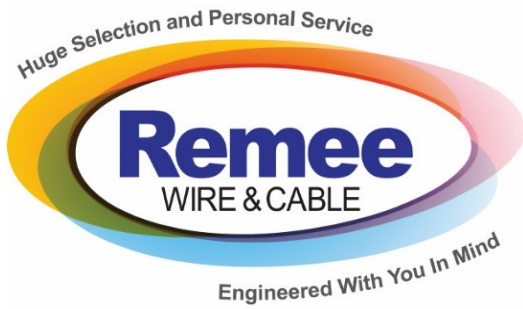

18-2 Unshielded + 1 Fiber Siamese Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 40-3300112SAO-2C18

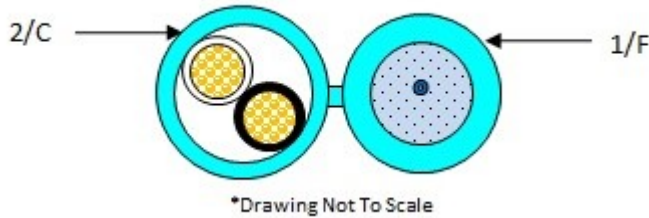

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____
Company: _____
Date: _____

Note: While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Issue Date: 03/16
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remeë.com