

Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 5333-SI

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Type SI-Reader: (White)

Number of Conductors: 6/C (1 Shielded Pair 22AWG + 2C 22 AWG + 2C 20 AWG)

RS-485: 1/P Shielded

(1) Pair: 22AWG Stranded Bare Copper.

Insulation Material: 0.025in. Foam FEP

Insulation Color Code: White, Green

Drain Wire: Stranded Tin Copper

Shield: Aluminum/Polyester (100% Coverage)

Electricals: Capacitance 12.5 pF/ft / Impedance 120Ω

(2) Conductor: 22AWG Stranded Bare Copper.

Insulation Material: 0.008in. Low Smoke Polyvinylchloride

Insulation Color Code: Orange, Yellow

(2) Conductor: 20AWG Stranded Bare Copper.

Insulation Material: 0.008in. Low Smoke Polyvinylchloride

Insulation Color Code: Red, Black

Jacket Material: Low Smoke Polyvinylchloride

Jacket Color: White


Rip Cord: Nylon

Nominal Diameter: 0.240 in.

Surface Print: VIGILANCE™ by REMEE 5333-SI (Amazon Logo) READER CMP

2/20AWG 4/22AWG c(ETL)us A B C D E 0 1 2 3 4 5 6 7 8 9 +

Sequential Foot Marking

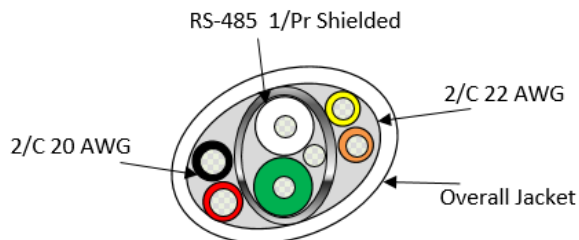

Remeë: 725963AMZM1W

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Capacitance RS-485 Cond-Cond: 12.5 pF/FT Nominal

Impedance RS-485: 120 ohms Nominal

DC Resistance - 20AWG: 10.5 Ohms / 1000ft @ 20C

DC Resistance - 22AWG: 16.5 Ohms / 1000ft @ 20C

Technical Details:

Temperature Rating: -20°C to 60°C

Weight: 33.5 Lbs/Mft

Codes & Listings:

- UL Subject 444, Type CMP
- C(ETL)US



MADE IN THE USA



Issue Date: 02/21
Revision: 7

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .


PO Box 488 468 RT17A Florida, NY 10921

Customer Service: 800-431-3864

Fax: 845-651-4160

Website: www.remeë.com

Page 1 of 2

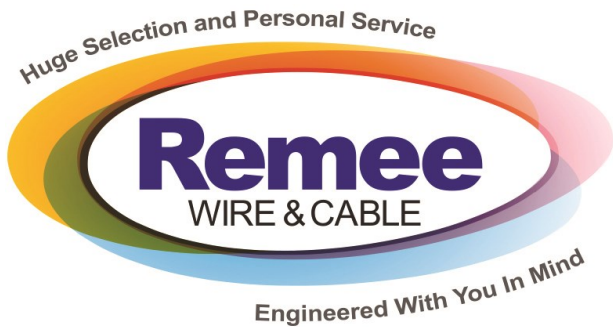

Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 5333-SI

Remeewire: 725963AMZM1W

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



Issue Date: 02/21
Revision: 7

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .