

# Category 6 Enhanced 650MHz Plenum

ETL verified for guaranteed performance  
Made in the USA

## Part No.: 6B234UTPENH

### Applications

Supports all Gigabit Ethernet/1000BASE-T/IEEE 802.3ab, ATM up to 155 Mbps, 100 Mbps Fast Ethernet 100BASE-T/IEEE 802.3, ANSI.X3.263 FDDI TP-PMD, Ethernet 10BASE-T/IEEE 802.5, T1/E1, xDSL, ISDN, 550 MHz Broadband Video and standards under development such as ATM at 622 Mbps, 1.2, 2.4 and 4.8 Gbps

### Construction Details:

No. 23 AWG solid bare copper conductor insulated with FEP. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled to form a core. The core is jacketed with low smoke flame retardant PVC.


Surface Print: ETL VERIFIED CAT6 TO TIA-568C.2...3122598  
CMP 23AWG 4UTP C(ETL)US ENHANCED FT6 MADE IN USA  
+ Sequential Footage Marking

### Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

### Electrical Parameters:

Suggested Working Voltage:	300 Volts, rms.
Mutual Capacitance:	14 pF/ft nominal
Capacitance Unbalance:	330 pF/100m maximum
Velocity of Propagation:	72%
Max. Conductor D.C.R.:	28.6 ohm/1000 feet
Max. DCR Unbalance:	5%
Max. Delay Skew:	45.0 ns/100m
Characteristic Impedance:	from 0.772 - 100 MHz 100 ± 15%
	from 101 - 250 MHz 100 ± 22%
	from 251 - 650 MHz 100 ± 32%

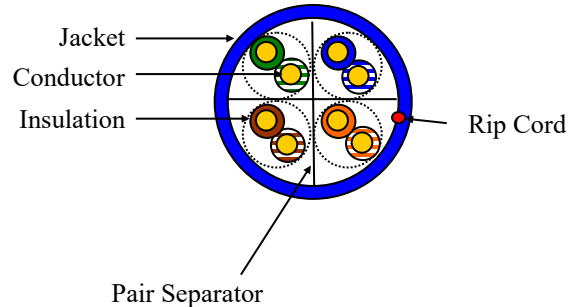

### Technical Details

Temperature Rating	
Installation:	0°C to 50°C
Operation:	-20°C to 60°C
Nominal Diameter:	0.230 in.
Nominal Cable Weight:	40 lbs/1,000 feet

### Standards

- ANSI/TIA/EIA 568C.2 Category 6
- National Electric Code – Article 800
- UL Subject 444

### Codes & Listings

- CMP rating FT6 & FT4
- ETL Electrically Verified to ANSI/TIA/EIA 568C.2 Category 6
- C(ETL)US CMP




Issue Date: 08/18  
Revision: 5

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

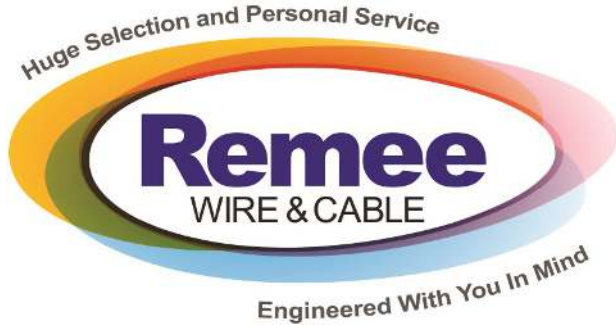

# Category 6 Enhanced 650MHz Plenum

ETL verified for guaranteed performance  
Made in the USA

Part No.: 6B234UTPENH

## Electrical Characteristics:

Frequency	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR
	dB	dB(100m)	dB	dB	dB	dB	dB	dB
MHz	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	20.0	2.0	80.3	78.3	73.8	70.8	78.3	76.3
4	23.0	3.8	71.3	69.3	61.8	58.8	67.5	65.5
10	25.0	6.0	65.3	63.3	53.8	50.8	59.3	57.3
16	25.0	7.6	62.2	60.2	49.7	46.7	54.6	52.6
20	25.0	8.5	60.8	58.8	47.8	44.8	52.3	50.3
31.25	23.6	10.7	57.9	55.9	43.9	40.9	47.2	45.2
62.5	21.5	15.4	53.4	51.4	37.9	34.9	38.0	36.0
100	20.1	19.8	50.3	48.3	33.8	30.8	30.5	28.5
200	18.0	29.0	45.8	43.8	27.8	24.8	16.8	14.9
250	17.3	32.8	44.3	42.3	25.8	22.8	11.5	9.5
300	16.8	36.4	43.1	41.1	24.3	21.3	-----	-----
350	16.3	39.8	42.1	40.1	22.9	19.9	-----	-----
400	15.9	43.0	41.3	39.3	21.8	18.8	-----	-----
500	14.8	49.5	40.2	38.2	20.0	17.0	-----	-----
550	14.4	53.1	39.5	37.5	18.9	15.9	-----	-----
650	18.6	56.8	36.1	34.1				

\*Values above 250 MHz are for engineering information only

## Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.




Issue Date: 08/18  
Revision: 5

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

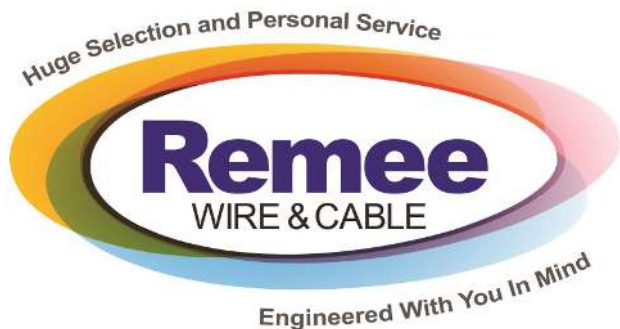

# Category 6E Enhanced 650MHz Plenum

ETL verified for guaranteed performance  
Made in the USA

## Part No.: 6B234UTPENH

**Note:** While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_



Issue Date: 08/18  
Revision: 5

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)