

Category 6 Enhanced 650MHz Non-Plenum

ETL verified for guaranteed performance
Made in the USA

Part No.: 6RF234UTPENH

Applications

Supports all Gigabit Ethernet/1000BASE-T/.IEEE 802.32ab, ATM up to 155 Mbps, 100 Mbps Fast Ethernet 100BASE-T/IEEE 802.3, ANSI.X3.263 FDDI TP-PMD, Ethernet 10BASE-T/IEEE 802.5, TI/EI, xDSL, ISDN, 550 MHz Broadband Video and standards under development such as ATM at 622 Mbps, 1.2, 2.4 and 4.8 Gbps

Construction Details:

No. 23 AWG solid bare copper conductor insulated with polyethylene. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled to form a core. The core is jacketed with a flame retardant PVC. Surface Print: ETL VERIFIED CAT6 TO TIA-568C.2...3122598 CMR ENHANCED CAT6 23AWG 4UTP C(ETL)US FT4 MADE IN USA

Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

Electrical Parameters:

Mutual Capacitance: 14 pF/ft nominal

Capacitance Unbalance: 330 pF/ft maximum

Velocity of Propagation: 70%


Max. Conductor D.C.R.: 28.6 ohm/1000 feet

Max. DCR Unbalance: 5%

Max. Delay Skew: 45.0 ns/100m

Characteristic Impedance: from $0.772 - 100 \text{ MHz} 100 \pm 15\%$

from 101 - 250 MHz $100 \pm 22\%$ from 251 - 650 MHz $100 \pm 32\%$



Technical Details

Temperature Rating

	nstallation:	0°C to 50°C
	Operation:	-10°C to 60°C
Nominal Diameter:		0.240 in.
Nominal Cable Weight:		34 lbs/1,000 feet

Standards

- ANSI/TIA/EIA 568C.2 Category 6
- National Electric Code Article 800

Codes & Listings

- CMR Rating FT4
- ETL Electrically Verified to ANSI/TIA/EIA 568C.2 Category 6
- C(ETL)US CMR







Issue Date: 08/18 Revision: 8

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com



Category 6 Enhanced 650MHz

ETL verified for guaranteed performance

Made in the USA

Part No.: 6RF234UTPENH

Electrical Characteristics:

Frequency	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR
	dB	dB(100m)	dB	dB	dB	dB	dB	dB
MHz	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	20.0	2.0	80.3	78.3	73.8	70.8	78.3	76.3
4	23.0	3.8	71.3	69.3	61.8	58.8	67.5	65.5
10	25.0	6.0	65.3	63.3	53.8	50.8	59.3	57.3
16	25.0	7.6	62.2	60.2	49.7	46.7	54.6	52.6
20	25.0	8.5	60.8	58.8	47.8	44.8	52.3	50.3
31.25	23.6	10.7	57.9	55.9	43.9	40.9	47.2	45.2
62.5	21.5	15.4	53.4	51.4	37.9	34.9	38.0	36.0
100	20.1	19.8	50.3	48.3	33.8	30.8	30.5	28.5
200	18.0	29.0	45.8	43.8	27.8	24.8	16.8	14.9
250	17.3	32.8	44.3	42.3	25.8	22.8	11.5	9.5
300	16.8	36.4	43.1	41.1	24.3	21.3		
350	16.3	39.8	42.1	40.1	22.9	19.9		
400	15.9	43.0	41.3	39.3	21.8	18.8		
500	14.8	49.5	40.2	38.2	20.0	17.0		
550	14.4	53.1	39.5	37.5	18.9	15.9		
650	18.6	56.8	36.1	34.1				

^{*}Values above 250 MHz are for engineering information only

Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.








Issue Date: 08/18 Revision: 8

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.

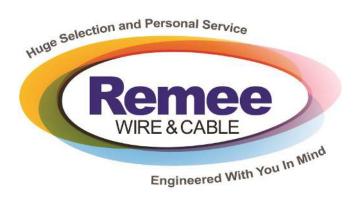

Category 6 650MHz Non-Plenum

ETL verified for guaranteed performance

Made in the USA

Part No.: 6RF234UTPENH

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remee Products Corp. does not guarantee that it is error-free, nor does Remee Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

mation of your order; this item may be non- cancelable and non-returnable.				
Signature:				
Company:				

Your signature constitutes that you have read and agreed to this specification sheet and upon confir-







Issue Date: 08/18 Revision: 8

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.