

# Category 6A Shielded Augmented 500 MHz

Made in the USA

Part No.: 6UA234STP

### Applications

Supports all category 6A applications including Ethernet 10 Gigabit, 100BASETX, 100BaseVG ANYLAN, 155ATM, 622ATM, NTSC/PAL Component or Composite Video, AES/EBU Digital Audio, AES51, RS-422.

### Construction Details:

No. 23 AWG copper conductor insulated with polyethylene. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled around a pair separator to form a core. The core is shielded and jacketed with a flame retardant PVC.

Surface Print: 3122598 CAT6A (AUGMENTED) 10GIG 4STP  
23AWG C(ETL)US CMR FT4 MADE IN USA

### Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

### Electrical Parameters:

Mutual Capacitance:	14 pF/ft nominal
Capacitance Unbalance:	330 pF/ft maximum
Velocity of Propagation:	70%
Max. Conductor D.C.R.:	28.6 ohm/1000 feet
Max. DCR Unbalance:	5%
Max. Delay Skew:	45 ns/100m
Characteristic Impedance:	from 0.772 - 100 MHz 100 ± 15%
	from 101 - 200 MHz 100 ± 22%
	from 201 - 500 MHz 100 ± 32%

### Technical Details

Temperature Rating	
Installation:	-0°C to 50°C
Operation:	-20°C to 60°C
Nominal Diameter:	0.305 in.
Maximum Installing Tension:	25 lbf
Minimum Bending Radius:	2.0 inch
Nominal Cable Weight:	50 lb/1000 feet

### Standards

- ANSI/TIA/EIA 568C.2 Category 6A
- National Electric Code – Article 800
- 11801:2002 Category 6A

### Codes & Listings

- CMR Rating FT4
- C(ETL)US CMR




MADE IN THE USA



Issue Date: 04/17  
Revision: 3

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remeë.com

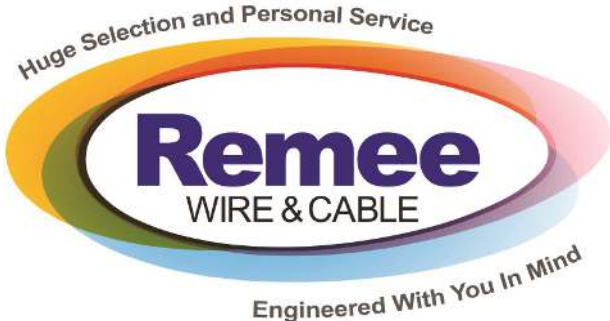

# Category 6A Shielded Augmented 500 MHz

Made in the USA

Part No.: 6UA234STP

## Electrical Characteristics:

Frequency MHz	Return Loss (dB/100m) Minimum	Insertion Loss (dB/100m) Maximum	NEXT (dB/100m) Minimum	PS-NEXT (dB/100m) Minimum	ACRF (dB/100m) Minimum	PS-ACRF (dB/100m) Minimum	Prop. Delay (dB/100m) Maximum	Alien Crosstalk	
								PS ANEXT (dB/100m) Minimum	PS AACRF (dB/100m) Minimum
1	20.0	2.0	74.3	72.3	67.8	64.8	570.0	67.0	67.0
4	23.0	3.8	65.3	63.3	52.8	52.8	552.0	67.0	66.2
8	24.5	5.3	60.8	58.8	46.7	46.7	546.7	67.0	60.1
10	25.0	5.9	59.3	57.3	44.8	44.8	545.4	67.0	58.2
16	25.0	7.4	56.2	54.2	40.7	40.7	543.0	67.0	54.1
20	25.0	8.3	54.8	52.8	38.8	38.8	542.0	67.0	52.2
25	24.3	9.3	53.3	51.3	36.8	36.8	541.2	67.0	50.2
31.25	23.6	10.5	51.9	49.9	34.9	34.9	540.4	67.0	48.3
62.5	21.5	14.9	57.4	45.4	28.9	28.9	538.6	65.6	42.3
100	20.1	19.1	44.3	42.3	24.8	24.8	537.6	62.5	38.2
155	18.8	24.0	41.4	39.4	21.0	21.0	536.9	59.6	34.4
200	18.0	27.5	39.8	37.8	18.8	18.8	536.5	58.0	32.2
250	17.3	31.0	38.3	36.3	16.8	16.8	536.3	56.5	30.2
300	16.8	34.2	37.1	35.1	15.3	15.3	536.1	55.3	28.7
350	16.3	37.2	36.1	34.1	13.9	13.9	535.9	54.3	27.3
400	15.9	40.0	35.3	33.3	12.8	12.8	535.8	53.5	26.2
500	15.2	45.2	33.8	31.8	10.8	10.8	535.6	52.0	24.2

## Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA



Issue Date: 04/17  
Revision: 3

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com



# Category 6A Shielded Augmented 500 MHz

Made in the USA

## Part No.: 6UA234STP

**Note:** While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_  
Company: \_\_\_\_\_  
Date: \_\_\_\_\_



MADE IN THE USA



Issue Date: 04/17  
Revision: 3

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remeë.com