

RG6 Coaxial Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725105/60

Applications

This document establishes the specifications for a plenum rated RG6/U, 75 ohm, coaxial cable used for computers, broadcast and CATV applications.

Construction Details

Center Conductor: 18AWG Solid Bare Copperweld

Dielectric Material: Foamed FEP Nominal Dielectric Core O.D: 0.176"

1st Shield: Aluminum/Polyester Tape (100% Coverage) 2nd Shield: Aluminum Braid (60% Coverage Nom.) Jacket Material: Remquard Plenum Polymer

Nominal Overall Diameter: 0.250"

Jacket Color: Per Customer Requiremnet Surface Print: 3122598 CMP RG-6/U 18AWG

C(ETL)US FT6 + Sequential Footage

Marking

Electricals

Nominal Capacitance: 17.3 pF/ft

Nominal Characteristic Impedance: 75 Ω Nominal Velocity of Propagation: 78%


Nominal Attenuation per 100 ft.:

0.30 dB @ 1 MHz 0.66 dB @ 10 MHz 1.60 dB @ 50 MHz 2.20 dB @ 100 MHz

3.00 dB @ 200 MHz 4.60 dB @ 400 MHz

6.60 dB @ 700 MHz

8.20 dB @ 1000 MHz

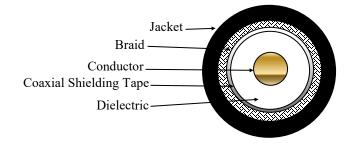

Technical Details

Temperature Rating

Operation -2°C to +60°C

Nominal Weight:

32 lbs. / 1,000 ft.

Standards

- NEC Article 800 & 820
- UL Subject 444 & 1581
- Type CMP, CATVP

Codes & Listings

C(ETL)US

Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.






Issue Date: 02/16 Revision: 5 All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com



RG6 Coaxial Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725105/60

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remee Products Corp. does not guarantee that it is error-free, nor does Remee Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

mation of your order; this item may be non-cancelable and non-returnable.	
Signature:	
Company:	
Date:	

Your signature constitutes that you have read and agreed to this specification sheet and upon confir-





Issue Date: 02/16 Revision: 5 All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com