

Low Cap Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725951

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Component 1 Construction Details:

Number of Conductors: 4/C
 Conductor: 18AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red, White, Green
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Gray
 Rip Cord: Nylon
 Nominal Diameter: 0.179 in.
 Surface Print: 3122598 POWER LOCK CMP 4/18AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 2 Construction Details:

Number of Conductors: 1/P
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Foam FEP
 Insulation Color Code: Black, White
 Overall Shield: Aluminum/Polyester
 Drain Wire: Stranded Tin Copper
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Orange
 Rip Cord: Nylon
 Nominal Diameter: 0.193 in.
 Surface Print: 3122598 CARD READER RS-485 CMP 1P/22AWG
 C(ETL)US A B C D E 0 1 2 3 4 5 6 7 8 9

Component 3 Construction Details:

Number of Conductors: 4/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red, White, Green
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Blue
 Rip Cord: Nylon
 Nominal Diameter: 0.141 in.
 Surface Print: 3122598 REX/SPARE CMP 4/22AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 4 Construction Details:

Number of Conductors: 2/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: White
 Rip Cord: Nylon
 Nominal Diameter: 0.122 in.
 Surface Print: 3122598 DOOR CONTACT CMP
 2/22AWG C(ETL)US A B C D E 0 1 2 3
 4 5 6 7 8 9

Overall Construction Details:

Construction: Four components are cabled together and overall jacketed
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Violet
 Nominal Jacket Thickness: 0.015 in.
 Nominal Diameter: 0.410 in.
 Surface Print: VIGILANCE™ by REMEE LOW CAP
 ACCESS CONTROL CABLE CMP 4/18AWG
 8/22AWG C(ETL)US + Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating	Operation:	-2°C to 60°C
Nominal Weight:	95 lbs. / 1,000 feet	

Codes & Listings:

- NEC Article 800
- UL Subject 444, Type CMP
- C(ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.


Issue Date: 08/20
Revision: 0

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com




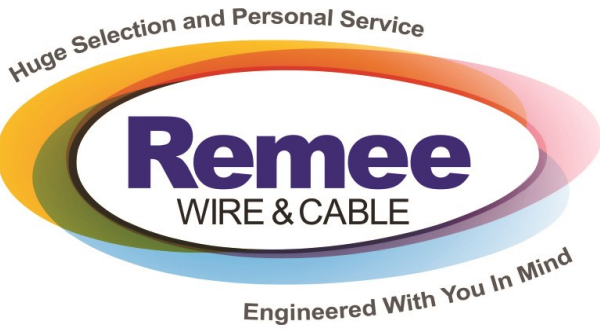

Low Cap Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725951

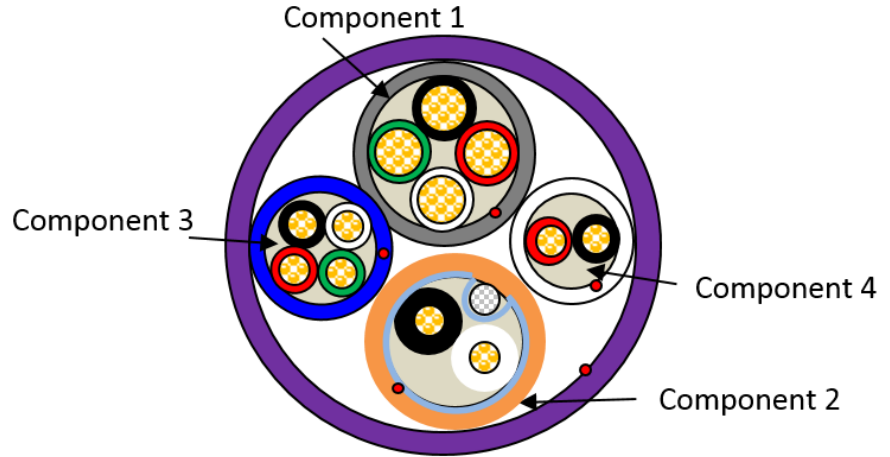

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____
Company: _____
Date: _____



Issue Date: 08/20
Revision: 0

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com