

# Activate™ uTP CMP Video, Ethernet, and Power

ETL Listed for guaranteed performance  
Made in the USA

Part No: ACT4P21PM1OW

## Applications

Optimized for building automation (BAS) and intelligent buildings (IBS) networked devices and non-conduit plenum wiring. Delivers both IP data or video signal and IEEE 802.3bt types, 1, 2, 3 and 4 PoE. Ideal for perimeter range security cameras including PTZ cameras. Supports all digital video surveillance protocols.

## Construction Details:


No. 21AWG solid bare copper conductor insulated with ultra low loss, high speed dielectric. Two colored mated insulated conductors twisted together to form a pair. Four pairs of varying twists are cabled with a spline separator to form the core. The core is jacketed with a low smoke flame retardant PVC.  
Surface Print: ACTIVATE™ by REMEE 21AWG 4uTP UTILITY TWISTED PAIR c(ETL)us CMP 75C FT6  
MADE IN USA + Sequential Footage Marking

## Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

## Electrical Parameters:

Mutual Capacitance:	14 pF / ft nominal
Capacitance Unbalance	1 pF / ft nominal
Velocity of Propagation	72%
Return Loss @ 100MHz	24 dB nominal
Pair D.C.R. (Loop Resistance):	9.7 ohm/100 meter
Resistance Unbalance:	0.042 ohm/100 meter
Characteristic Impedance @ 100 MHz	100 ± 15%
DCR Single Conductor:	4.85 ohm/100 meter
Delay Skew	34 ns/100m typical

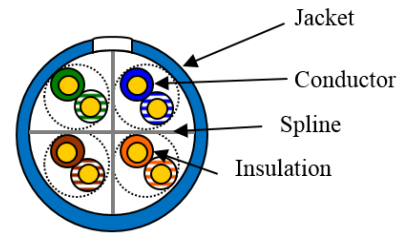

## Technical Details

Temperature Rating	
Installation	0°C to 50°C
Operation	-2°C to 75°C
Nominal Diameter	0.300 in.
Nominal cable weight:	45 lb/1000 feet

## Standards

- NEC Article 800
- UL Subject 444
- NFPA 262 , CSA FT6
- CSA 22.2
- IEEE 802.3bt including Type 4

## Codes & Listings

- CMP rating FT6
- C(ETL)US



MADE IN THE USA




Issue Date: 2/21  
Revision: 4

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

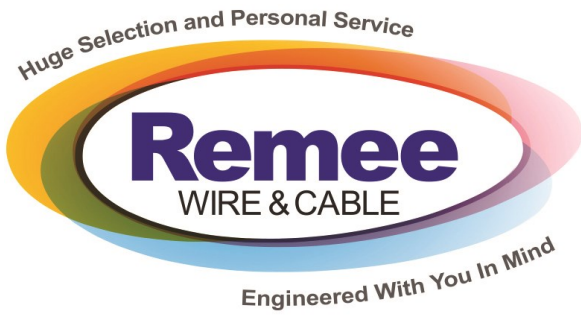

# Activate™ uTP CMP Video, Ethernet, and Power

ETL Listed guaranteed performance  
Made in the USA

Part No: ACT4P21PM1OW

## Remote Voltage

PoE Type 1: Voltage at the Powered Device (PD)* for Input Voltage and Distance (37V minimum required)						
Input Voltage	325ft	500ft	650ft	750ft	850ft	1000ft
44V	42.6	41.8	41.1	40.7	40.3	39.6
48V	46.7	46.0	45.4	45.0	44.6	44.0
52V	50.8	50.1	49.6	49.2	48.8	48.3
57V	55.9	55.3	54.8	54.5	54.1	53.6

15.4W @ PSE. 13W required @ PD. Power on 1 Pair

PoE Type 2: Voltage at the Powered Device (PD)* for Input Voltage and Distance (42.5V minimum required)						
Input Voltage	325ft	500ft	650ft	750ft	850ft	1000ft
50V	47.5	46.2	45.1	44.3	43.5	<b>42.5</b>
52V	49.6	48.3	47.3	46.5	45.8	44.7
55V	52.8	51.5	50.5	49.8	49.1	48.1
57V	54.8	53.7	52.7	52.0	51.3	50.3

30W @ PSE. 25.5W required @ PD. Power on 1 Pair



MADE IN THE USA




Issue Date: 2/21  
Revision: 4

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

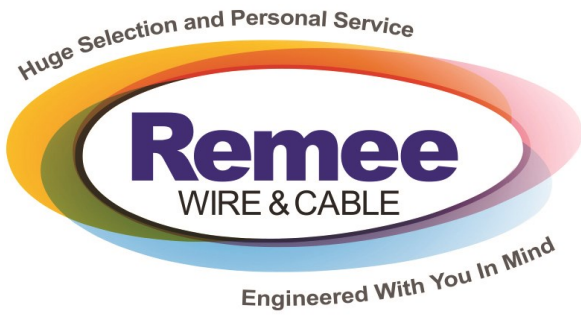

# Activate™ uTP CMP Video, Ethernet, and Power

ETL Listed guaranteed performance  
Made in the USA

Part No: ACT4P21PM1OW

## Remote Voltage

PoE Type 3: Voltage at the Powered Device (PD)* for Input Voltage and Distance (42.5V minimum required)						
Input Voltage	325ft	500ft	650ft	750ft	850ft	1000ft
50V	47.5	46.2	45.1	44.3	43.5	<b>42.5</b>
52V	49.6	48.3	47.3	46.5	45.8	44.7
55V	52.8	51.5	50.5	49.8	49.1	48.1
57V	54.8	53.7	52.7	52.0	51.3	50.3

60W @ PSE. 51W required @ PD. Power on 2 Pairs

PoE Type 4: Voltage at the Powered Device (PD)* for Input Voltage and Distance (41.1V minimum required)						
Input Voltage	325ft	500ft	650ft	750ft	850ft	1000ft
50V	46.6	44.7	43.1	42.1	<b>41.1</b>	39.4
52V	48.7	46.9	45.4	44.4	43.4	41.8
55V	51.9	50.2	48.7	47.8	46.8	45.4
57V	54.0	52.4	51.0	50.0	49.1	47.7

100W @ PSE. 71W required @ PD. Power on 2 Pairs



MADE IN THE USA




Issue Date: 2/21  
Revision: 4

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

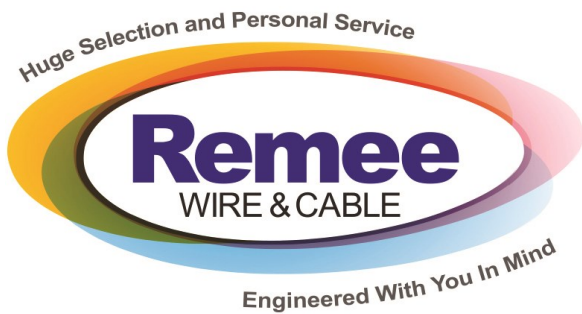

# Activate™ uTP CMP Video, Ethernet, and Power

ETL Listed guaranteed performance  
Made in the USA

Part No: ACT4P21PM1OW

### Compliant Network & Video Standards:

10BASE-T	ATM-51
100BASE-TX	ATM-155
100BASE-T4	M-JPEG
100VG-AnyLan	MPEG-4
1000BASE-T	MPEG-TS
2.5GBASE-T	Motion JPEG 2000
5GBASE-T	Dirac
ATM-25	PGF

### Digital Cliff Guidance: Max. Distance for Data Rate

10 Mb/s	950 ft	Data transmission distance is dependent on equipment, signal frequency, system installation, and data or video format. Actual results vary.
100 Mb/s	925 ft	
1 Gb/s	750 ft	

### Connectors:

Remeë ACTIVATE™ works well with many M12 and RJ45 style connectors for UTP cables including:

- M12 Styles
- METZ Connect      MNF881A315-0001
  - Panduit              ISPS6A88MFA
  - Phoenix Contact    1422844
  - TE Connectivity     T4111002081-000
- RJ45 Styles
- Platinum Tools     ezEX48 or 106190 or 106191
  - Sentinel             111-0800090L34
  - Simply 45            S45-1700P

\* Remote voltage tables are theoretical values calculated based on Ohms Law.  
Equipment may limit the distance between the PSE and PD using other criteria such as voltage, amperage, and/or circuit loop resistance. Such limitations may be in observation of IEEE 802 criteria as interpreted by the equipment manufacturer or by their specifications.  
Current Amps (A) = Watts (W) / Volts (V) and Voltage Drop (Vd) = Current (A) x Resistance (Ω)  
Activate Resistance is 9.7Ω/100m loop resistance/pair; or 4.9Ω/100m conductor.




Issue Date: 2/21  
Revision: 4

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864      Fax: 845-651-4160      Website: [www.remee.com](http://www.remee.com)

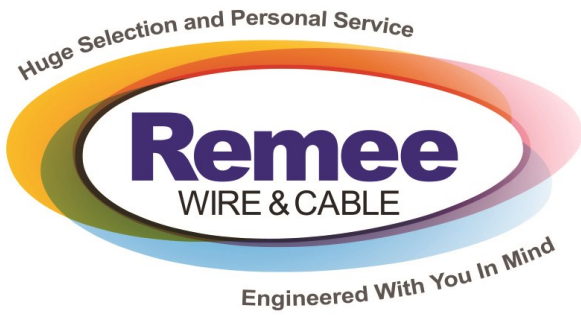

# Activate™ uTP CMP Video, Ethernet, and Power

ETL Listed guaranteed performance  
Made in the USA

Part No: ACT4P21PM1OW

### Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

**Note:** While Remeo Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeo Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeo Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_  
Company: \_\_\_\_\_  
Date: \_\_\_\_\_



Issue Date: 2/21  
Revision: 4

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)