

22-2 Shielded 16-2 Unshielded Riser

Part No.: LUQSCM10W

Applications:

This document establishes the specifications for a two pair, one pair shielded cable used for communication applications.

Construction Details:


Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Foam Polyethylene
 Nominal Insulation Thickness: 0.025 in.
 Nominal Insulation diameter: 0.080 in.
 Color Code: White paired with Violet
 Shield: Aluminum/Polyester Tape (100% Coverage)
 Drain: 24AWG 7/32 Tin Copper

Conductor: 16AWG Stranded Bare Copper.
 Insulation Material: PVC
 Nominal Insulation Thickness: 0.015 in.
 Nominal Insulation Diameter: 0.088 in.
 Color Code: Black, Red

Jacket Material: PVC
 Jacket Color: Blue with a White Stripe
 Nominal Diameter: 0.260 in.
 Surface Print:
 LUTRON QSH-CBL-M TYPE 3122598 16AWG 2C +
 22AWG 1PR SHIELDED DATA 75°C C(ETL)US CL3R OR
 CMR/CMG FT-4 "ROHS II" MADE IN THE USA
 +Sequential Footage Marking

Standards:

- National Electric Code - Article 800
- UL Subject 444 Type CMR
- CMG FT4

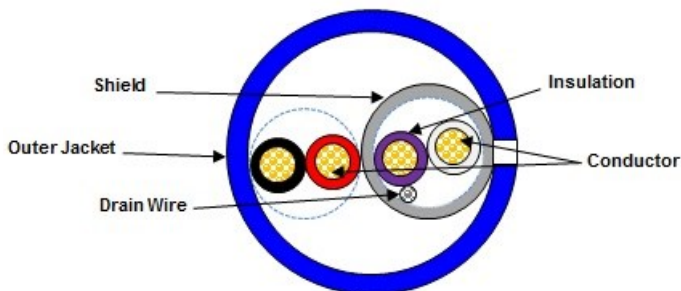

Electricals:

Suggested Working Voltage: 300 V RMS
 Capacitance Cond-Cond 22AWG: 15 pF/FT
 Impedance: 85 Ω
 DCR 22awg: 15.0 ohms/1M'
 DCR 16awg: 3.73 ohms/1M'

Technical Details:

| | | |
|-----------------------|---------------------|----------------|
| Temperature Rating | Operation | -20°C to +75°C |
| Nominal Weight: | 41 Lbs. / 1,000 ft. | |
| Pull Tension: | 65 lbf | |
| Bend Radius unloaded: | 2.40" | |
| Bend Radius loaded: | 4.80" | |

Codes & Listings:

- C(ETL)US FT4



MADE IN THE USA




Issue Date: 5/20
 Revision: 4

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

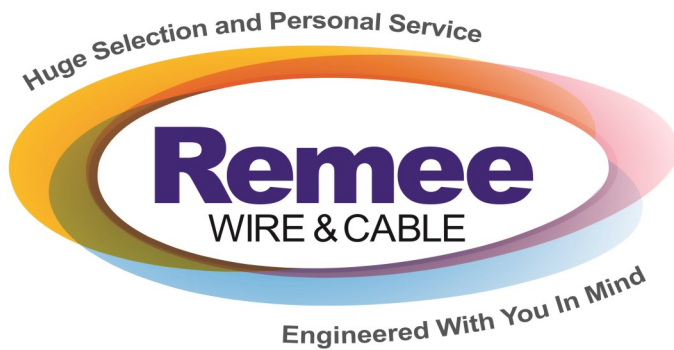

22-2 Shielded 16-2 Unshielded Riser

Part No.: LUQSCM10W

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Reme Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Reme Products Corp. does not guarantee that it is error-free, nor does Reme Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Reme Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Reme Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order. The Reme Wire & Cable warranty is an integral part of this specification. This item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA



Issue Date: 5/20
Revision: 4

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com