

16-4 Unshielded Riser

ETL listed for guaranteed performance
Made in the USA

Part No.: R001023R

Applications:


This document establishes the specifications for a for conductor riser-rated cable used in communication applications, suitable for outdoor use.

Construction Details:

Number of Conductors: 4/C
 Conductor: 16AWG 7/.0192 Stranded Bare Copper
 Insulation Material: Polyvinyl Chloride
 Insulation Thickness: 0.012 in.
 Insulation Diameter: 0.080 in.
 Color Code: Black, Red, White, Green
 Jacket Material: Polyvinyl Chloride
 Jacket Color: Gray (Others with MOQ)
 Jacket Thickness: 0.018 in.
 Nominal Diameter: 0.238 in.
 Surface Print: Vigilance™ by REMEE CMR/FPLR
 16AWG C(ETL)US FT4 MADE IN USA RoHS +
 Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.
 Nom. Capacitance Cond-Cond: 39 pF/FT
 Nom. Impedance: 23 Ω
 Nom. Velocity of Propagation: 55%
 Nom. DCR: 3.85 ohm/1M' @ 20°C

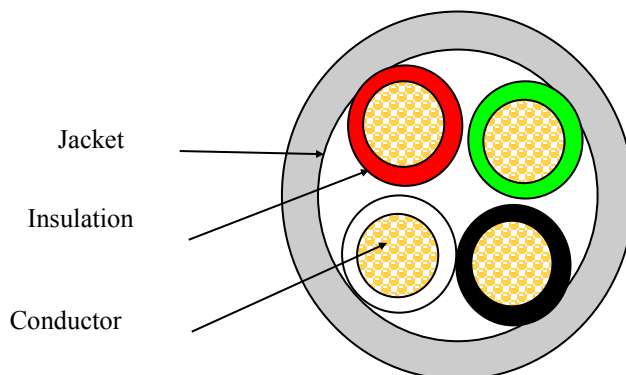

Technical Details:

Temperature Rating
 Operation: -20°C to +60°C
 Nominal Weight: 50 lbs. / 1,000 ft.

Standards:

- National Electric Code - Article 800, 760
- UL Subject 444, Type CMR FT4
- UL Subject 1424, Type FPLR

Codes & Listings:

- C(ETL)US CMR



Issue Date: 02/22
 Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.


This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864

Fax: 845-651-4160

Website: www.remee.com

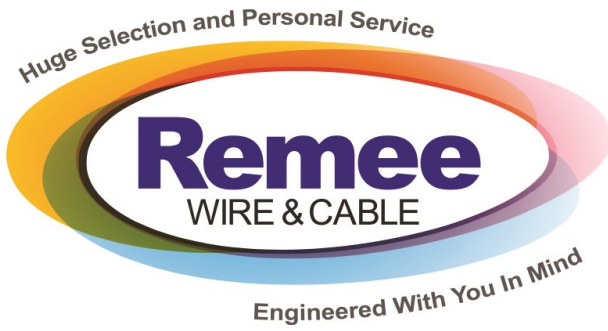

16-4 Unshielded Riser

ETL listed for guaranteed performance
Made in the USA

Part No.: R001023R

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length Designations — **M for 1000 feet**, and **L for 500 feet**

Available Put-Up's — **1 for Reel**, and **2 for Box**

Available Jacket Color — **G for Gray**, (Other Colors Available with Minimum Order Quantities)

These 3-place designators are placed at the end of the specific part number to fully describe the individual packaging and length.

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order. The Remee Wire & Cable warranty is an integral part of this specification. This item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA



Issue Date: 02/22
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864

Fax: 845-651-4160

Website: www.remee.com