

Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725901

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Component 1 Construction Details:

Number of Conductors: 4/C
 Conductor: 18AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red, White, Green
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: White with Purple Stripe
 Rip Cord: Nylon
 Nominal Diameter: 0.179 in.
 Surface Print: LOCK POWER CMP 4/18AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 2 Construction Details:

Number of Conductors: 6/C (3-pair)
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black/Red; White/Green; Brown/Blue
 Overall Shield: Aluminum/Polyester
 Drain Wire: Stranded Tin Copper
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: White with Yellow Stripe
 Rip Cord: Nylon
 Nominal Diameter: 0.200 in.
 Surface Print: CARD READER CMP 3P/22AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 3 Construction Details:

Number of Conductors: 4/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red, White, Green
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: White with Red Stripe
 Rip Cord: Nylon
 Nominal Diameter: 0.141 in.
 Surface Print: REX/SPARE CMP 4/22AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 4 Construction Details:

Number of Conductors: 2/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: White with Green Stripe
 Rip Cord: Nylon
 Nominal Diameter: 0.122 in.
 Surface Print: DOOR CONTACT CMP
 2/22AWG C(ETL)US A B C D E 0 1 2 3
 4 5 6 7 8 9

Overall Construction Details:

Construction: Four components are cabled together and overall jacketed
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Yellow
 Nominal Jacket Thickness: 0.015 in.
 Nominal Diameter: 0.410 in.
 Surface Print: VIGILANCE™ by REMEE ACCESS
 CONTROL CABLE CMP 4/18AWG 12/22AWG C(ETL)
 US + Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

| | |
|--------------------|--------------------------|
| Temperature Rating | Operation: -20°C to 60°C |
| Nominal Weight: | 99 lbs. / 1,000 feet |

Codes & Listings:

- NEC Article 800
- UL Subject 444, Type CMP
- C(ETL)US



MADE IN THE USA




Issue Date: 06/22
Revision: 13

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .


1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

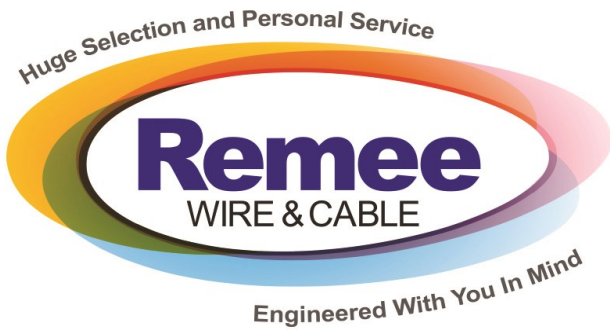

Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725901

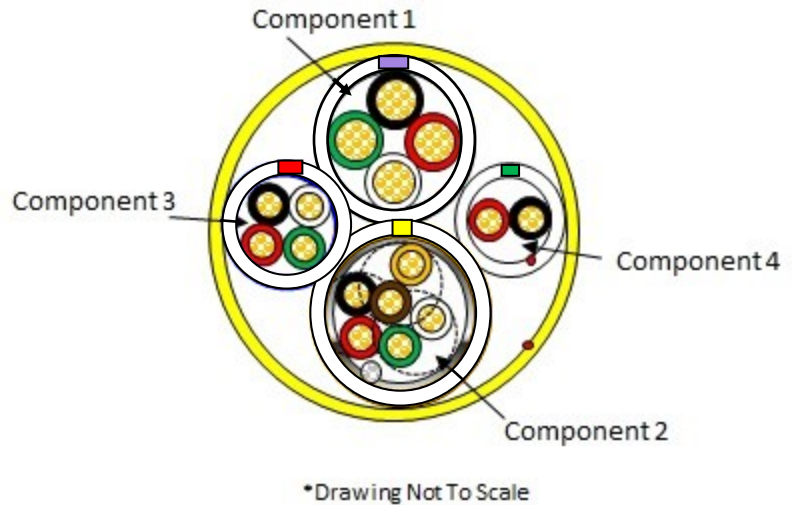

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____
 Company: _____
 Date: _____



Issue Date: 06/22
Revision: 13

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com