

Part No.: 601004CGYBUB

Applications:

This document establishes the specifications for a four conductor unshielded cable with XLPE insulation and a sunlight resistant polyvinylchloride jacket and used in WTTC and UL AWM applications.

Construction Details:

Number of Conductors: 4/C

Conductor: 10AWG 105/30 Stranded Bare Copper

Class K Stranding Insulation Material: XLPE

Nominal Insulation Diameter: 0.178 in. Color Code: Black number coded 1-ONE

> Black number coded 2-TWO Black number coded 3-THREE

Green/Yellow

Filler: Fibrillated Polypropylene Tape: Foam Polypropylene Jacket Material: Polyvinylchloride Nominal Diameter: 0.575 in.

Jacket Color: Black

Surface Print: WTTC 3122598 1000V FT4 SUN RES

OIL RES I & II 10AWG 4/C яU AWM 90°C Wet or Dry -40°C...CSA CIC-TC 90°C DRY 90°C WET 600V FT4 SUN RES OIL RES -40°C AND AWM I/II A/B 90°C 1000V FT4 -40°C "ROHS II" MADE IN USA (Lot #) +

Sequential Footage Marking

Technical Details:


Temperature Rating

-40°C to + 90°C Operation:

234 lbs. / 1.000 feet Nominal Weight:

10 AWG 4 Conductor **XLPE**

ETL Listed for Guaranteed Performance Made in the USA

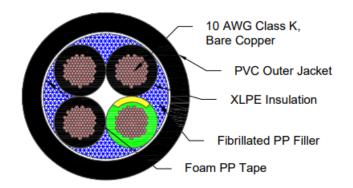

Electricals:

Voltage Rating: 1000V/600 VRMS

Nom. DC Resistance @ 20°C: 1.01 Ohms/1M'

Codes & Standards:

- UL Subject 758, AWM 2587, UL 2277
- CSA C22.2 No. 210
- CSA C22.2 239
- Sun Res 1000 Hours, Oil Res I/II
- AWM I/II A/B

Listings:

- C(ETL)
- (ETL) US







Issue Date: 07/22 Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.

1751 State RTE, 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com



10 AWG 4 Conductor XLPE

ETL Listed for Guaranteed Performance
Made in the USA

Part No.: 601004CGYBUB

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remee Products Corp. does not guarantee that it is error-free, nor does Remee Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.	
Signature:	
Company:	
ъ.	

Your signature constitutes that you have read and







Issue Date: 07/22 Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.