


Huge Selection and Personal Service

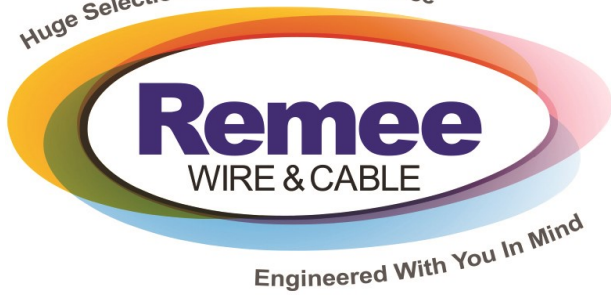

# OSDP (2P) Access Control Cable Plenum

ETL listed for guaranteed performance  
Made in the USA

Part No.: 725953

## Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

## Component 1 Construction Details:

Number of Conductors: 4/C  
Conductor: 18AWG Stranded Bare Copper.  
Insulation Material: Remguard Plenum Polymer  
Insulation Color Code: Black, Red, White, Green  
Jacket Material: Remguard Plenum Polymer  
Jacket Color: Gray  
Rip Cord: Nylon  
Nominal Diameter: 0.179 in.  
Surface Print: 3122598 POWER LOCK CMP 4/18AWG C(ETL)US  
A B C D E 0 1 2 3 4 5 6 7 8 9

## Component 2 Construction Details:

Number of Conductors: 2/P  
Conductor: 22AWG Stranded Bare Copper.  
Insulation Material: Foam FEP  
Insulation Color Code: Green paired with White; & Black paired with Red  
Overall Shield: Aluminum/Polyester  
Drain Wire: Stranded Tin Copper  
Jacket Material: Remguard Plenum Polymer  
Jacket Color: Orange  
Rip Cord: Nylon  
Nominal Diameter: 0.193 in.  
Surface Print: 3122598 CARD READER RS-485 CMP 2P/22AWG  
C(ETL)US A B C D E 0 1 2 3 4 5 6 7 8 9  
Nominal Pair Capacitance: 12.5 pF/FT  
Nominal Impedance: 120 ohms

## Component 3 Construction Details:

Number of Conductors: 4/C  
Conductor: 22AWG Stranded Bare Copper.  
Insulation Material: Remguard Plenum Polymer  
Insulation Color Code: Black, Red, White, Green  
Jacket Material: Remguard Plenum Polymer  
Jacket Color: Blue  
Rip Cord: Nylon  
Nominal Diameter: 0.141 in.  
Surface Print: 3122598 REX/SPARE CMP 4/22AWG C(ETL)US  
A B C D E 0 1 2 3 4 5 6 7 8 9

## Component 4 Construction Details:

Number of Conductors: 2/C  
Conductor: 22AWG Stranded Bare Copper.  
Insulation Material: Remguard Plenum Polymer  
Insulation Color Code: Black, Red  
Jacket Material: Remguard Plenum Polymer  
Jacket Color: White  
Rip Cord: Nylon  
Nominal Diameter: 0.122 in.  
Surface Print: 3122598 DOOR CONTACT CMP  
2/22AWG C(ETL)US A B C D E 0 1 2 3  
4 5 6 7 8 9

## Overall Construction Details:

Construction: Four components are cabled together and overall jacketed  
Jacket Material: Remguard Plenum Polymer  
Jacket Color: Violet  
Nominal Jacket Thickness: 0.015 in.  
Nominal Diameter: 0.410 in.  
Surface Print: VIGILANCE™ by REMEE LOW CAP ACCESS CONTROL CABLE CMP 4/18AWG 10/22AWG C(ETL)US + Sequential Footage Marking

## Electricals:

Suggested Working Voltage: 300 Volts, rms.

## Technical Details:

Temperature Rating	Operation:	-2°C to 60°C
Nominal Weight:	145 lbs. / 1,000 feet	

## Codes & Listings:

- NEC Article 800
- UL Subject 444, Type CMP
- C(ETL)US




Issue Date: 05/24  
Revision: 4

**All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).**

This product is RoHS compliant to directive 2002/95/EC .


1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

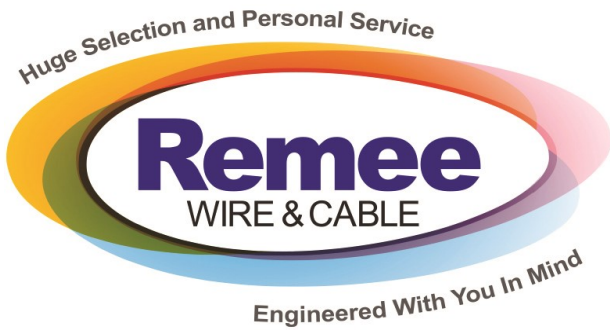

# OSDP (2P) Access Control Cable Plenum

ETL listed for guaranteed performance  
Made in the USA

Part No.: 725953

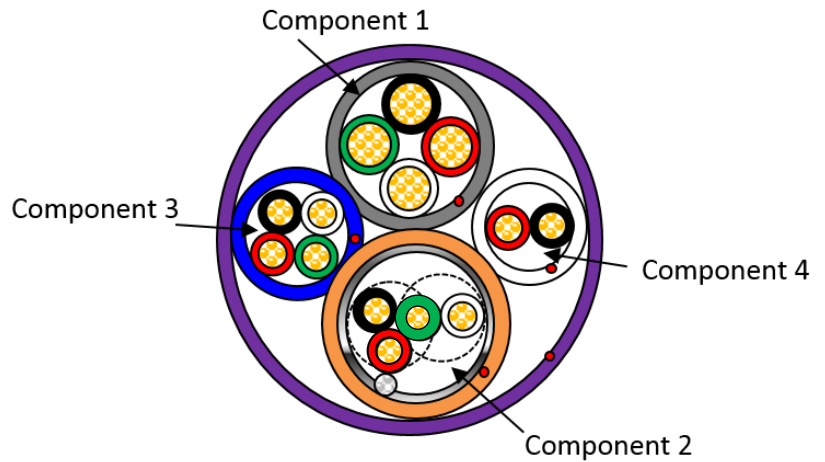

### Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

**Note:** While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Date: \_\_\_\_\_



Issue Date: 05/24  
Revision: 4

**All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).**

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A1751 State RTE. 17A STE #1 Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)