


Part No: 11-XXX-XXX-AXNONF

Issue Date: 08/30/2018

Revision #: 00

## 11-Series Tight Buffer Indoor Riser Distribution Fiber Optic Cable

### Cable Cross Section

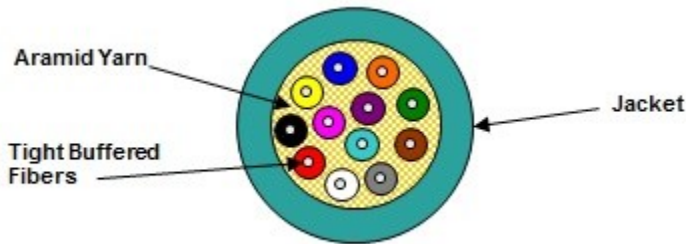

*(Representation of a standard 12 fiber construction)*

### Applicable Documents

- TIA/EIA FOTP Standards 455
- Color Coding of Fiber Optic Cables TIA/EIA-598
- UL 1666
- GR-409 CORE
- Compliant with ANSI/TIA-568-C.3 standard

### Cable Construction Details

- Tight Buffered Fiber  
Dimension: 900 $\mu$ m, Nominal
- Tight Buffer Color Code:  
As per TIA/EIA-598 standard or per customer requirement
- Cable Strength:  
Aramid yarns are pulled in with tight buffered fibers under the outer sheath.
- Overall Sheath: Riser Rated Polyvinyl Chloride

### Scope

This document establishes the specification requirements for a distribution indoor all dielectric fiber optic cable. This cable construction consists of a distribution tight-buffer design with a riser rated PVC jacket.

### Applications

Indoor in the Riser Space and Tray Installations

*Continued*

Huge Selection and Personal Service

**Remee**  
WIRE & CABLE

Engineered With You In Mind

Nominal Cable Dimensions & Weights			
Remee Products Part Number	Number of Fibers	Cable OD in (mm)	Weight lb/1000ft (kg/km)
11-002-XXX-AXNONF	2	0.170(4.3)	11 (16)
11-004-XXX-AXNONF	4	0.185 (4.7)	13 (19)
11-006-XXX-AXNONF	6	0.200 (5.1)	16 (24)
11-008-XXX-AXNONF	8	0.210 (5.3)	18 (27)
11-012-XXX-AXNONF	12	0.250 (6.4)	23 (34)
11-024-XXX-AXNONF-T	24	0.319 (8.1)	37 (55)

*\*Cables printed in meters will have a "-MR" suffix on the part number.*

Jacket Color	
Designation	Color
B	Black
Y	Yellow
Z	Orange
A	Aqua
M	Violet

Fiber Type (P/N)	Maximum Attenuation dB/km				Overfill Launch Min Bandwidth ( MHz-km)		EMBc (MHz-km)	Gigabit Ethernet Minimum Link Distance (Meters)		10 Gigabit Ethernet Minimum Link Distance (Meters)	
	850 nm	1300 nm	1310 nm	1550 nm	850 nm	1300 nm		850 nm	1300 nm	850 nm	1300 nm
62.5µm OM1 1GIG (22J)	3.2	1.0	N/A	N/A	200	600	N/A	300	550	32	-
50µm OM2 10GIG (12D)	3.0	1.0	N/A	N/A	750	500	N/A	800	550	150	-
50µm OM3 10GIG (12N)	3.0	1.0	N/A	N/A	1500	500	2000	1000	550	300	-
50µm OM4 10GIG (12V)	3.0	1.0	N/A	N/A	3500	500	4700	1040	550	550	-
SM OS2 G.652.D (76K)	N/A	N/A	0.40	0.30	N/A	N/A	N/A	N/A	5000	N/A	10000
SM OS2 G.652.D (74K)	N/A	N/A	0.35	0.25	N/A	N/A	N/A	N/A	5000	N/A	10000
SM OS2 G.652.D/G.657.A1 BIF (76U)*	N/A	N/A	0.40	0.30	N/A	N/A	N/A	N/A	5000	N/A	10000
SM OS2 G.652.D/G.657.A2, B2 BIF (76F)**	N/A	N/A	0.40	0.30	N/A	N/A	N/A	N/A	5000	N/A	10000

\* G.657.A1 (76U) Mandrel Radius of 10mm, 1 turn at 1550nm with an induced attenuation of ≤0.50dB

\*\* G.657.A2,B2 (76F) Mandrel Radius of 7.5mm, 1 turn at 1550nm with an induced attenuation of ≤0.40dB

Please call the factory for all other fiber types

Continued

**Remee Wire & Cable**  
1751 State Rte 17A  
Florida, New York 10921

**Phone: 800.431.3864**  
Fax: 845.651.4160  
Email: info@remee.com

[www.remee.com](http://www.remee.com)





## Mechanical & Environmental Performance

- Maximum Tensile Load

Installation : 2&4 fiber-1405N / 315lbf  
6&8 fiber-1610N/362lbf  
12 &24 fiber-2700N/600lbf  
Long Term : 2&4 fiber-455N / 102lbf  
6&8 fiber-535N/120lbf  
12 &24 fiber-600N/135lbf

- Minimum Bending Radius

Loaded : 20 x Diameter  
Unloaded : 10 x Diameter

- Crush Resistance

100 N/cm

- Impact Resistance (min.)

25 Impacts

- Flexing  $\pm 90^\circ$  (min.)

25 Cycles

- Temperature Rating

Operation : -40°C to +85°C  
Installation : 0°C to +75°C  
Storage : -55°C to +85°C

## Warranty Information

All warranty information can be viewed at [www.remeë.com](http://www.remeë.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

## Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

**Note:** While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this documents are for reference purposes only and are subject to change without notice.

## Spec Approval (Custom Designs Only)

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order: this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_ Date: \_\_\_\_\_