


Part No: 33M-XXX-XXX-RXSLGP

Issue Date: 08/24/2018

Revision #: 00

## 33M-Series Micro Distribution Indoor Plenum Rated Fiber Optic Cable

### Cable Cross Section

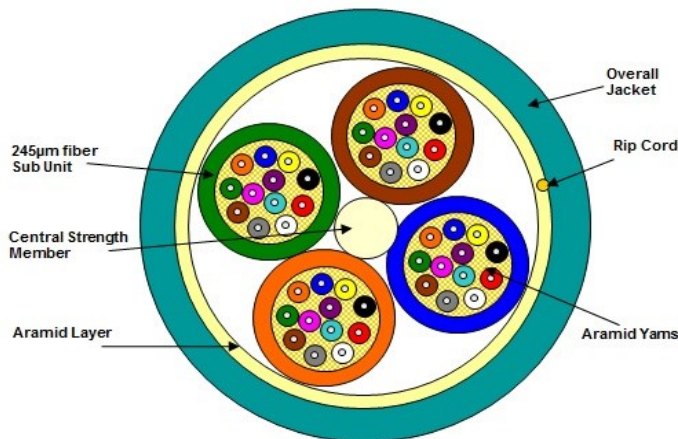

(Representation of a standard 48 fiber construction)

### Scope

This document establishes the specification requirements for an indoor all dielectric micro distribution fiber optic cable. This cable construction consists of a 245µm fibers with aramid yarns and a plenum rated jacket.

### Applications

Indoors in the Plenum Space and Tray Installations

### Applicable Documents

- TIA/EIA FOTP Standards 455
- Color Coding of Fiber Optic Cables TIA/EIA-598
- UL 910
- GR-409-CORE
- Compliant with ANSI/TIA-568-C.3 standard

### Cable Construction Details

- Fiber
  - Dimension: 245µm, Nominal
- Tight Buffer Color Code:
  - As per TIA/EIA-598 standard or per customer requirement
- Sub Unit Construction:
  - Aramid yarns are pulled in with fibers under a sub-unit jacket.
  - Nominal OD is 2.0mm
- Dielectric Central Strength Member:
  - Epoxy Glass Rod (up-coated as required per construction)
- Cable Core:
  - Sub-units and fillers are stranded around the CSM, using reverse oscillation.
  - Binder yarns are applied over the core tape.
- Overall Sheath: UV Resistant Remguard Plenum Rated Polymer
  - A ripcord applied under the overall sheath.

Continued

Huge Selection and Personal Service

**Remee**  
WIRE & CABLE

Engineered With You In Mind

Nominal Cable Dimensions & Weights				
Remee Products Part Number	Number of Fibers	Number of Fibers Per Sub Unit	Cable OD in (mm)	Weight lb/1000ft (kg/km)
33M-024-XXX-RXSLGP	24	12	0.258 (6.6)	26 (38)
33M-036-XXX-RXSLGP	36	12	0.258 (6.6)	23 (35)
33M-048-XXX-RXSLGP	48	12	0.258 (6.6)	23 (35)
33M-072-XXX-RXSLGP	72	12	0.300 (7.6)	33 (49)
33M-096-XXX-RXSLGP	96	12	0.353 (9.0)	45 (67)
33M-144-XXX-RXSLGP	144	12	0.410 (10.4)	48 (72)

*\*Cables printed in meters will have a "-MR" suffix on the part number.*

Jacket Color	
Designation	Color
B	Black
Y	Yellow
Z	Orange
A	Aqua
M	Violet

Fiber Type (P/N)	Maximum Attenuation dB/km				Overfill Launch Min Bandwidth ( MHz-km)		EMBc (MHz-km)	Gigabit Ethernet Minimum Link Distance (Meters)		10 Gigabit Ethernet Minimum Link Distance (Meters)	
	850 nm	1300 nm	1310 nm	1550 nm	850 nm	1300 nm		850 nm	1300 nm	850 nm	1300 nm
62.5µm OM1 1GIG (22J)	3.2	1.0	N/A	N/A	200	600	N/A	300	550	32	-
50µm OM2 10GIG (12D)	3.0	1.0	N/A	N/A	750	500	N/A	800	550	150	-
50µm OM3 10GIG (12N)	3.0	1.0	N/A	N/A	1500	500	2000	1000	550	300	-
50µm OM4 10GIG (12V)	3.0	1.0	N/A	N/A	3500	500	4700	1040	550	550	-
SM OS2 G.652.D (76K)	N/A	N/A	0.40	0.30	N/A	N/A	N/A	N/A	5000	N/A	10000
SM OS2 G.652.D (74K)	N/A	N/A	0.35	0.25	N/A	N/A	N/A	N/A	5000	N/A	10000
SM OS2 G.652.D/G.657.A1 BIF (76U)*	N/A	N/A	0.40	0.30	N/A	N/A	N/A	N/A	5000	N/A	10000
SM OS2 G.652.D/G.657.A2, B2 BIF (76F)**	N/A	N/A	0.40	0.30	N/A	N/A	N/A	N/A	5000	N/A	10000

\* G.657.A1 (76U) Mandrel Radius of 10mm, 1 turn at 1550nm with an induced attenuation of ≤0.50dB

\*\* G.657.A2,B2 (76F) Mandrel Radius of 7.5mm, 1 turn at 1550nm with an induced attenuation of ≤0.40dB

Please call the factory for all other fiber types

Continued

**Remee Wire & Cable**  
1751 State Rte 17A  
Florida, New York 10921

**Phone: 800.431.3864**  
Fax: 845.651.4160  
Email: info@remee.com

[www.remee.com](http://www.remee.com)





## Mechanical & Environmental Performance

- Maximum Tensile Load  
Installation : 660N / 150lbf  
Long Term : 198N / 45lbf
- Minimum Bending Radius  
Loaded : 20 x Diameter  
Unloaded : 10 x Diameter
- Impact Resistance (min.)  
25 Impacts
- Flexing  $\pm 90^\circ$  (min.)  
25 Cycles
- Temperature Rating  
Operation : 0°C to +70°C  
Installation : 0°C to +70°C  
Storage : -40°C to +70°C

## Warranty Information

All warranty information can be viewed at [www.remeo.com](http://www.remeo.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

## Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

**Note:** While Remeo Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeo Products Corp. does not guarantee that it is error-free, nor does Remeo Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeo Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeo Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this documents are for reference purposes only and are subject to change without notice.

## Spec Approval (Custom Designs Only)

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order: this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_ Date: \_\_\_\_\_