

Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 5465-AMZ-EXD

Rev. 8 Gray overall jacket

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Component 1 Type RX - MO:

Number of Conductors: 4/C (2C 20 AWG + 2C 22 AWG)
(2) Conductor: 20AWG Stranded Bare Copper.
Insulation Material: 0.008in. Low Smoke Polyvinylchloride
Insulation Color Code: Black, Red

(2) Conductor: 22AWG Stranded Bare Copper.
Insulation Material: 0.008in. Low Smoke Polyvinylchloride
Insulation Color Code: Green, White

Jacket Material: Low Smoke Polyvinylchloride
Jacket Color: Light Blue
Rip Cord: Nylon
Nominal Diameter: 0.160 in.
Surface Print: VIGILANCE™ by REMEE TYPE RX - MO CMP
2/20AWG 2/22AWG c(ETL)us A B C D E 0 1 2 3 4 5 6 7 8 9

Component 2 Type DC - CONTACT:

Number of Conductors: 2/C
Conductor: 22AWG Stranded Bare Copper.
Insulation Material: 0.008in. Low Smoke Polyvinylchloride
Insulation Color Code: Green, White
Jacket Material: Low Smoke Polyvinylchloride
Jacket Color: Green
Rip Cord: Nylon
Nominal Diameter: 0.122 in.
Surface Print: VIGILANCE™ by REMEE TYPE DC - CONTACT CMP
2/22AWG c(ETL)us A B C D E 0 1 2 3 4 5 6 7 8 9

Component 3 Type HN - Horn:

Number of Conductors: 2/C
Conductor: 20AWG Stranded Bare Copper.
Insulation Material: 0.008in. Low Smoke Polyvinylchloride
Insulation Color Code: Red, Black
Jacket Material: Low Smoke Polyvinylchloride
Jacket Color: Orange
Rip Cord: Nylon
Nominal Diameter: 0.138 in.
Surface Print: VIGILANCE™ by REMEE TYPE HN - HORN CMP
2/20AWG c(ETL)us A B C D E 0 1 2 3 4 5 6 7 8 9

Overall Construction Details:

Construction: Three components are cabled together and overall jacketed
Jacket Material: Low Smoke Polyvinylchloride
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.315 in.
Jacket Color: Gray
Surface Print: VIGILANCE™ by REMEE ACCESS CONTROL CABLE 5465-AMZ/EXD (logo) CMP 4/20AWG 4/22AWG C(ETL)US + Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating:	-20°C to 60°C
Nominal Weight:	55 lbs. / 1,000 feet

Codes & Listings:

- UL Subject 444, Type CMP
- C(ETL)US



MADE IN THE USA




Issue Date: 5/12
Revision: 8

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160

Website: www.remee.com

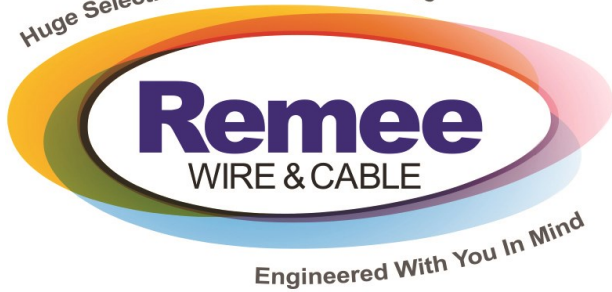


Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 5465-AMZ-EXD

Rev. 8 Gray overall jacket

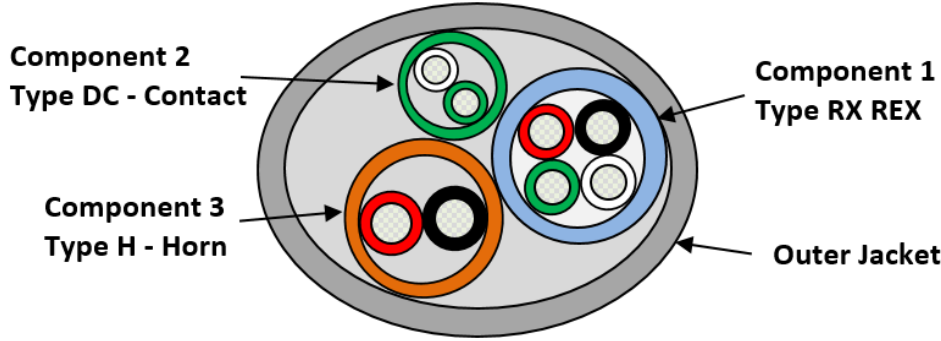

Remeew: 725962AMZM1G

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remeew Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeew Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeew Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .