

6 AWG 4 Conductor XLPE

ETL Listed for Guaranteed Performance
Made in the USA

Part No.: 600604CGYBUB

Applications:

This document establishes the specifications for a four conductor unshielded cable with XLPE insulation and a sunlight resistant polyvinylchloride jacket and used in WTTC and UL AWM applications.

Construction Details:


Number of Conductors: 4/C
 Conductor: 6AWG 259/30 Stranded Bare Copper
 Class K Stranding
 Insulation Material: XLPE
 Nominal Insulation Diameter: 0.290 in.
 Color Code: Black number coded 1-ONE
 Black number coded 2-TWO
 Black number coded 3-THREE
 Green/Yellow
 Filler: Fibrillated Polypropylene
 Tape: Foam Polypropylene
 Jacket Material: Polyvinylchloride
 Nominal Diameter: 0.890 in.
 Jacket Color: Black
 Surface Print: WTTC 3122598 1000V FT4 SUN RES OIL RES
 I & II 6AWG 4/C 90°C Wet or Dry
 -40°C...CSA CIC 90°C DRY 90°C WET 600V
 TC FT4 SUN RES OIL RES -40°C AND AWM
 I/II A/B 90°C 1000V FT4 -40°C "ROHS II"
 MADE IN USA (Lot #) + Sequential Footage
 Marking

Technical Details:

Temperature Rating

Operation: -40°C to + 90°C

Nominal Weight: 540 lbs. / 1,000 feet

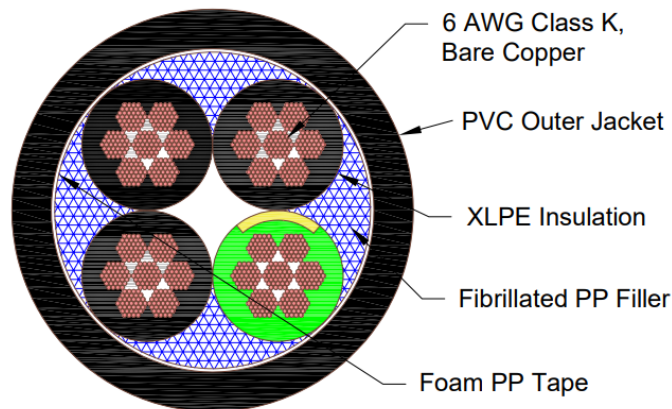

Electricals:

Voltage Rating: 1000V/600 VRMS

Nom. DC Resistance @ 20°C: 0.40 Ohms/1M'

Codes & Standards:

- UL Subject 758, AWM 2587, UL 2277
- CSA C22.2 No. 210
- CSA C22.2 239
- Sun Res 1000 Hours, Oil Res I/II
- AWM I/II A/B

Listings:

- ETL(US)
- C(ETL)


Issue Date: 06/22
Revision: 2

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .



1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

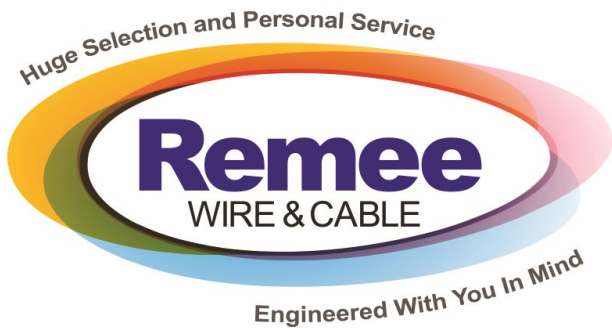

6 AWG 4 Conductor XLPE

ETL Listed for Guaranteed Performance
Made in the USA

Part No.: 600604CGYBUB

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



Issue Date: 06/22
Revision: 2

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com