



Category 6 Shielded 250MHz Polyethylene Jacket

Made in the USA

Part No.: 6DB234STP

Applications

Supports all category 6 applications including Ethernet 100BASE-TX, 100BASE-VG and 155 ATM. Particularly suited for high bandwidth applications such as 622 ATM, Wideband, Ethernet 1000BASE-T and emerging applications with anticipated data rates to 3.2 Gbps.

Construction Details:

No. 23 AWG solid bare copper conductor insulated with polyolefin. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled around a pair separator to form a core. The core is overall shielded and jacketed with polyethylene. Suitable for outdoor use.


Surface Print: 4 PAIR STP 234 AWG SOLID CAT6 SUITABLE FOR OUTDOOR USE DIRECT BURIAL + Sequential Footage Marking

Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

Electrical Parameters:

Mutual Capacitance:	14 pF/ft nominal
Capacitance Unbalance:	330 pF/ft maximum
Velocity of Propagation:	70%
Max. Conductor D.C.R.:	28.6 ohm/1000 feet
Max. DCR Unbalance:	5%
Max. Delay Skew:	45.0ns/100m
Characteristic Impedance:	from 0.772 – 100 MHz 100 ± 15%
	from 101 – 250 MHz 100 ± 22%

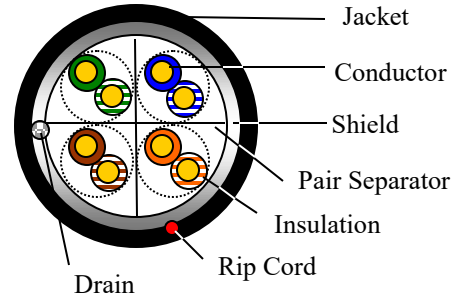

Technical Details

Temperature Rating	Installation	-0°C to 50°C
	Operation	-20°C to 60°C
Nominal Diameter	0.305 in.	
Nominal cable weight:	49 lb/1000 feet	

Standards

- ANSI/TIA/EIA 568C.2 Category 6




MADE IN THE USA

Issue Date: 06/15
Revision: 2

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

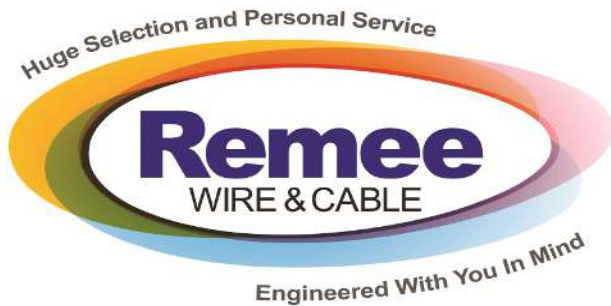

Category 6 Shielded 250MHz Polyethylene Jacket

Made in the USA

Part No.: 6DB234STP

Electrical Characteristics:

Frequency	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR
MHz	dB	dB(100m)	dB	dB	dB	dB	dB	dB
	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	20.0	2.0	80.3	78.3	73.8	70.8	78.3	76.3
4	23.0	3.8	71.3	69.3	61.8	58.8	67.5	65.5
10	25.0	6.0	65.3	63.3	53.8	50.8	59.3	57.3
16	25.0	7.6	62.2	60.2	49.7	46.7	54.6	52.6
20	25.0	8.5	60.8	58.8	47.8	44.8	52.3	50.3
31.25	23.6	10.7	57.9	55.9	43.9	40.9	47.2	45.2
62.5	21.5	15.4	53.4	51.4	37.9	34.9	38.0	36.0
100	20.1	19.8	50.3	48.3	33.8	30.8	30.5	28.5
200	18.0	29.0	45.8	43.8	27.8	24.8	16.8	14.9
250	17.3	32.8	44.3	42.3	25.8	22.8	11.5	9.5

Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeewire Products Corp. does not guarantee that it is error-free, nor does Remeewire Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA

Issue Date: 10/13
Revision: 1

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.