

# 18-8 Unshielded Plenum

ETL listed for guaranteed performance  
Made in the USA

Part No.: 725188

## Applications:


This document establishes the specifications for a plenum-rated eight conductor unshielded cable used for communications and signaling power limited circuit applications.

## Construction Details:

Number of Conductors: 8/C  
 Conductor: 18AWG Stranded Bare Copper  
 Stranding: 7 Strands  
 Insulation Material: Remguard Plenum Polymer  
 Nominal Insulation Thickness: 0.007 in.  
 Nominal Insulation Diameter: 0.060 in.  
 Color Code: Black, Red, White, Green, Brown, Blue, Orange, Yellow  
 Jacket Material: Remguard Plenum Polymer  
 Nominal Jacket Thickness: 0.015 in.  
 Jacket Color: White (Others with MOQ)  
 Nominal Diameter: 0.228 in.  
 Rip Cord: Nylon  
 Jacket Color: White or Per Customer Requirement  
 Surface Print: VIGILANCE™ by REMEE CMP/  
 FPLP 18AWG C(ETL)US FT6 MADE IN USA  
 RoHS +Sequential Footage Marking

## Electricals:

Suggested Working Voltage: 300 Volts, rms.  
 Nom. Impedance: 12 Ohms  
 Nom. DC Resistance: 6.51 Ohms/1M' @ 20°C  
 Nom. Capacitance, adjacent conductors: 50.4 pF/Ft

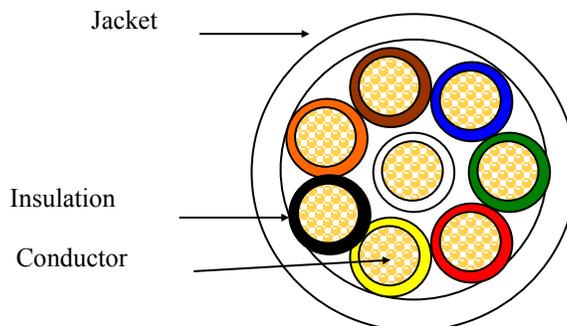

## Technical Details:

Temperature Rating	Operation:	-2°C to +60°C
Nominal Weight:		57 lbs. / 1,000 ft.

## Standards:

- NEC Articles 800, 760
- UL Subject 1424, Type FPLP
- UL Subject 444, Type CMP FT6

## Codes & Listings:

- C(ETL)US CMP




Issue Date: 04/22  
 Revision: 6

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

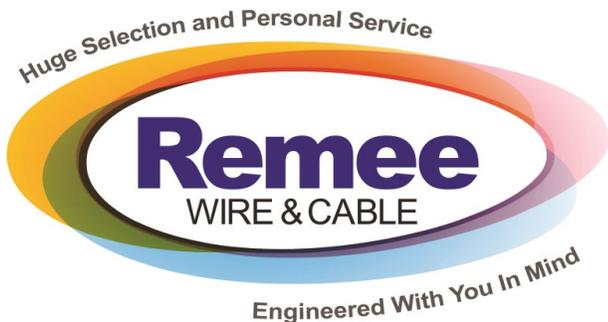

# 18-8 Unshielded Plenum

ETL listed for guaranteed performance  
Made in the USA

Part No.: 725188

### Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length Designations — **M for 1000 feet**, and **L for 500 feet**

Available Put-Up's — **1 for Reel**, and **2 for Box**

Available Jacket Color — **W for White**, (Other Colors Available with Minimum Order Quantities)

**These 3-place designators are placed at the end of the specific part number to fully describe the individual packaging and length.**

**Note:** While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_



MADE IN THE USA



Issue Date: 04/22  
Revision: 6

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)