

Shielded Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725914

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Component 1 Construction Details:

Number of Conductors: 4/C
 Conductor: 18AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red, White, Green
 Jacket Material: Remguard Plenum Polymer
 Shield: Aluminum/polyester
 Drain Wire: Stranded Tin Copper
 Jacket Color: Gray
 Rip Cord: Nylon
 Nominal Diameter: 0.182 in.
 Surface Print: 3122598 POWER LOCK CMP 4/18AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 2 Construction Details:

Number of Conductors: 6/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red, White, Green, Orange, Brown
 Overall Shield: Aluminum/Polyester
 Drain Wire: Stranded Tin Copper
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Orange
 Rip Cord: Nylon
 Nominal Diameter: 0.200 in.
 Surface Print: 3122598 CARD READER CMP 6C/22AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 3 Construction Details:

Number of Conductors: 2/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red
 Shield: Aluminum/polyester
 Drain Wire: Stranded Tin Copper
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: White
 Rip Cord: Nylon
 Nominal Diameter: 0.128 in.
 Surface Print: 3122598 DOOR CONTACT CMP 2/22AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 4 Construction Details:

Number of Conductors: 4/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Remguard Plenum Polymer
 Insulation Color Code: Black, Red, Green, White
 Shield: Aluminum/polyester
 Drain Wire: Stranded Tin Copper
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Blue
 Rip Cord: Nylon
 Nominal Diameter: 0.144 in.
 Surface Print: 3122598 REX/SPARE CMP 4/22AWG
 C(ETL)US A B C D E 0 1 2 3 4 5 6 7 8 9

Overall Construction Details:

Construction: Four components are cabled together and overall jacketed
 Jacket Material: Remguard Plenum Polymer
 Nominal Jacket Thickness: 0.015 in.
 Nominal Diameter: 0.410 in.
 Jacket Color: Blue
 Surface Print: VIGILANCE™ by REMEE SHIELDED ACCESS CONTROL CABLE CMP 4/18AWG 12/22AWG C(ETL)US + Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temp. Rating Operation -20°C to 60°C
 Nominal Weight: 99 lbs. / 1,000 feet

Codes & Listings:

- NEC Article 800
- UL Subject 444, Type CMP
- C(ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Issue Date: 09/20
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.


This product is RoHS compliant to directive 2002/95/EC .



MADE IN THE USA




PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

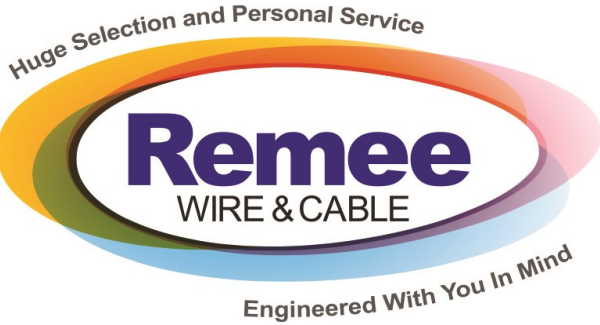

Shielded Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725914

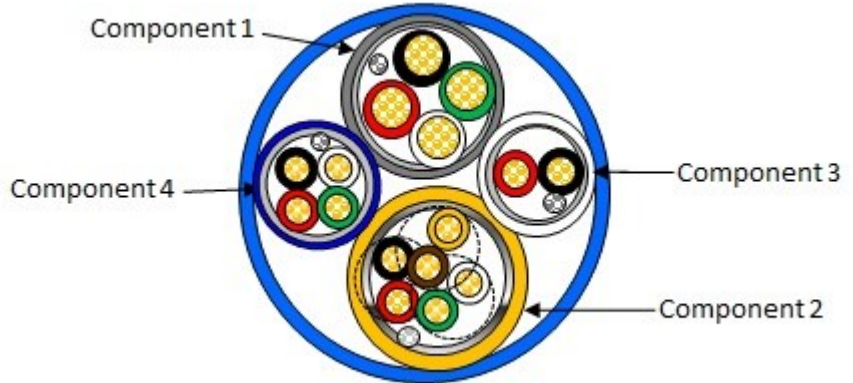

Note: While Remeee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



Issue Date: 09/20
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com