

22-2 Shielded Audio Cable Riser Rated

Part No.: B1P22TOSEZ

Applications:

This document establishes the specifications for a two conductor (1 pair) shielded cable used for low noise analog audio, in-wall microphone, communication, or low voltage control cable where mid - capacitance and small diameter are specified. For use in horizontal runs and vertical risers, not in plenum spaces.

Construction Details:

Number of Conductors: 2/C
 Conductor: 22AWG 7/30 Stranded Tin Copper
 Insulation Material: Polyethylene
 Nominal Insulation Thickness: 0.0075 in.
 Color Code: Black, Red
 Drain Wire*: 24AWG Stranded Tin Copper
 Shield*: Aluminum/Polyester (100% Coverage)
 Jacket Material: Polyvinyl Chloride
 Nominal Jacket Diameter: 0.135 in.
 Jacket Color: Gray, or per order
 Print:
 3122598 CMR C(ETL)US 22AWG SINGLE PAIR
 AUDIO CABLE 75°C FT4 ROHS COMPLIANT MADE
 IN USA + Sequential Footage Marking

Note: Drain wire is inside the foil. Foil is facing in. Foil strips off when the jacket is removed, as with automated stripping equipment.

Codes & Listings:


- C(ETL)US

Issue Date: 08/20
 Revision: 7

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

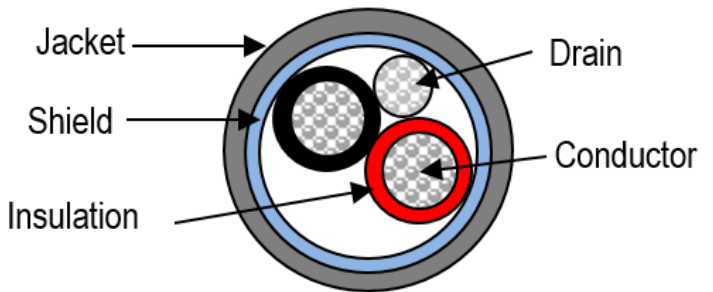

Electricals:

Suggested Working Voltage:	300 Volts
Nom Capacitance Cond-Cond:	35 pF/ft
Nom Cap. Cond. To Cond.+Shld:	67 pF/ft
Velocity of Propagation:	66%

Technical Details:


Temperature Rating		
	Operation	-20°C to +75°C
	Installation	-20°C to +75°C

Nominal Weight:	13.2 lbs. / 1,000 ft.
-----------------	-----------------------

Standards:

- NEC Article 800
- UL Subject 444, Type CMR FT4
- UL 1666



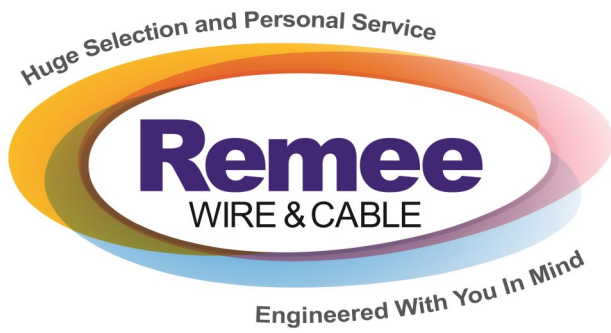

22-2 Shielded Audio Cable Riser Rated

Part No.: B1P22TOSEZ

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remeo Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeo Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeo Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA



Issue Date: 08/20
Revision: 7

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com